


Straightpoint

Load Monitoring Products



making the lifting industry a safer place

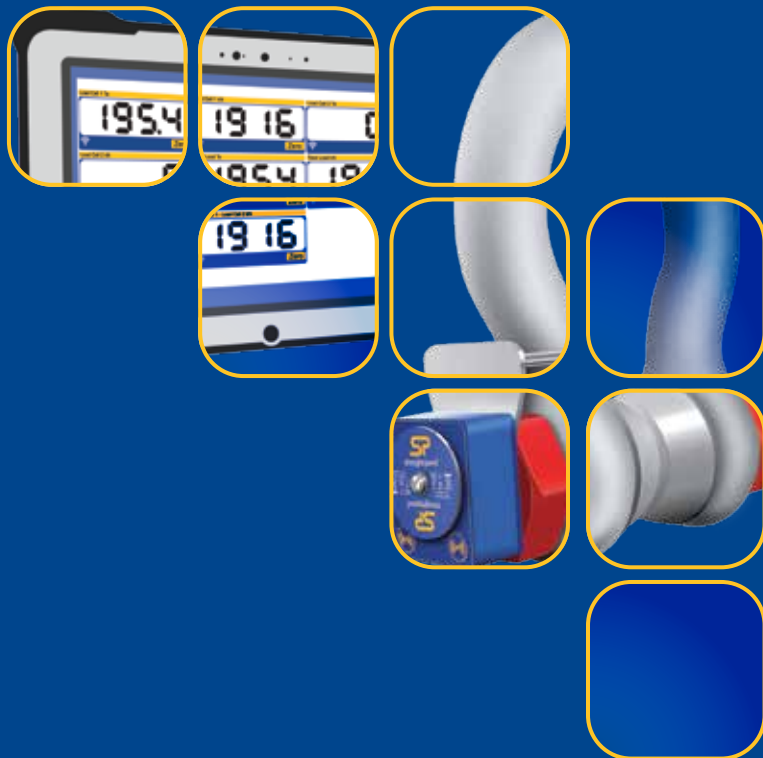



Radiolink plus



Hardened bushes to accept industry standard shackles

Std. AA Batteries 1200hrs Easy no tools access

Internal Antennae

Environmental protection IP67/NEMA6

High quality hard anodised aerospace aluminium

Angular ends to reduce weight and snagging when rigged



Wall or Cab Mount Bracket available for handheld Part No. SU3282

700m/2300ft Wireless Range

100Hz Peak Hold

Preset Tare

90db Audible Overload Alarm

Multiple Display Units t/lbs/kg/kN

DNV-GL type approved wireless tension load cell capable of weighing and dynamic load monitoring in capacities from 1t to 500t – from stock with an ATEX and IECEx version available for hazardous areas, zones 0, 1 & 2.

Two versions of the RLP are available:

- Long range 2.4GHz version providing industry leading wireless range of 700m or 2300ft to SP's SW-HHP handheld or software options.
- Bluetooth output and can be connected to any smart phone running our free HHP app on iOS or Android at ranges up to 100m or 328ft.

Constructed from high quality aerospace grade aluminium it features an advanced internal design structure. This design not only provides the product with an unrivalled strength to weight ratio but it also allows the use of a separate internal sealed enclosure providing the load cell's electronic components with IP67 or NEMA6 environmental protection even with the battery cover plate missing, making this industry leading dynamometer even more suitable for use in the harshest environments.

The versatile RLP is supplied with an update rate of 3Hz and can be easily configured to run at industry leading speeds of up to 200Hz making it ideal for dynamic force measurement. It is designed to be rigged with standard industry shackles from manufacturers such as Crosby, Van Beest and GN Rope.

Decades of development into this product include many stand out features such as SP's unique strain gauging method that helps compensate for wire rope torque when the Radiolink is loaded. The Radiolink plus tension load cell can also be used in combination with Straightpoint SW-MWLC high speed wireless data logging software allowing for simultaneous control, display and real time data logging of up to 100 Straightpoint wireless load cells.

A full array of wireless accessories are also available including signal boosters, LED wireless scoreboards and base stations with analogue (4-20mA, 0-10v, 0-5v) or digital (RS232/485, Modbus RTU, and ASCII) outputs.

Other features and benefits:

- Proprietary 2.4 GHz Wireless
 - Remote On-Off from handheld display or software
 - ATEX Zones 0, 1 & 2 available
 - Design validated by F.E.A.
 - 2 year warranty
 - DNV-GL Type Approval
 - Complies with ASME B30.26
 - Bluetooth option is available and is supplied with a free HHP App for iOS and Android
- See page 29



making the lifting industry a safer place

Also available with
hazardous area approval



ATEX / IECEx

Ex ia II C T4 Ga

Certification numbers:


RLP ATEX

IECEx SIR 15.0071X / Sira 15ATEX2195X

SW-HHP ATEX

IECEx SIR 15.0072X / Sira 15ATEX2196X

**Add 'ATEX' to the part number
when ordering ATEX/IECEx products.
For example: RLP6T5-ATEX**

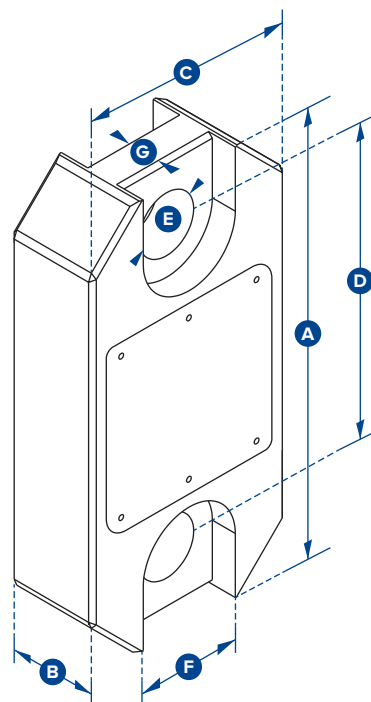

Part Number	RLP1T	RLP2T5	RLP6T5	RLP12T	RLP25T	RLP35T	RLP55T	RLP75T	RLP100T	RLP150T	RLP200T	RLP250T	RLP300T	RLP500T
Capacity	1,000kg 2200lb	2.5te 5500lb	6.5te 14300lb	12te 26000lb	25te 55000lb	35te 77000lb	55te 120000lb	75te 165000lb	100te 220000lb	150te 330000lb	200te 440000lb	250te 550000lb	300te 660000lb	500te 1100000lb
Resolution	0.5kg 1lb	0.001te 2lb	0.001te 2lb	0.002te 5lb	0.005te 10lb	0.005te 10lb	0.01te 20lb	0.01te 20lb	0.05te 100lb	0.05te 100lb	0.1te 200lb	0.1te 200lb	0.1te 200lb	0.1te 200lb
Units	kg lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb
Weight	1.5kg 3.3lb	1.5kg 3.3lb	2.4kg 5.3lb	3.7kg 8.2lb	5kg 11lb	8.6kg 19lb	13kg 28.7lb	16kg 35.3lb	34kg 75lb	46kg 101.4lb	82kg 180.8lb	82kg 180.8lb	118kg 260lb	248kg 546.7lb
Safety Factor	12:1	7:1	7:1	7:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1	5:1	5:1
Battery Type	Handheld 2 x AA/Load cell 4 x AA													
Battery Life	Handheld 60 hours/Load cell 1200 hours continuous													
Display Type	6 digit 25mm / 1" LCD													
Operating Temp	-10°C to +50°C / 14°F to 122°F													
Accuracy	± 0.3% of applied load													
Frequency	2.4 GHz													
System Range	700 metres / 2300 feet (100 metres /328 feet if Bluetooth)													
Data Rate	3 Hz - up to 200 Hz can be ordered for dynamic load monitoring applications													
Protection	IP67 / NEMA 6													
Dimension A	204 8.03"	204 8.03"	249 9.80"	305 12.01"	340 13.39"	393 15.47"	424 16.69"	470 18.50"	608 23.94"	670 26.38"	700 27.56"	700 27.56"	806 31.73"	930 36.61"
Dimension B	43 1.69"	43 1.69"	43 1.69"	47 1.85"	60 2.36"	75 2.95"	75 2.95"	75 2.95"	99 3.90"	99 3.90"	144 5.67"	144 5.67"	150 5.91"	150 5.91"
Dimension C	104 4.09"	104 4.09"	113 4.45"	113 4.45"	115 4.53"	126 4.96"	180 7.09"	202 7.95"	255 10.04"	303 11.93"	350 13.78"	350 13.78"	426 16.77"	570 22.44"
Dimension D	146 5.75"	146 5.75"	165 6.50"	193 7.60"	215 8.46"	225 8.86"	230 9.06"	260 10.24"	320 12.60"	360 14.17"	350 13.78"	350 13.78"	350 13.78"	450 17.71"
Dimension ØE	24.5 0.96"	24.5 0.96"	38 1.50"	47.5 1.87"	55 2.17"	60 2.36"	76 2.99"	76 2.99"	109 4.29"	109 4.29"	145 5.71"	145 5.71"	160 6.30"	200 7.87"
Dimension F	48 1.89"	48 1.89"	66 2.60"	Not relevant in this capacity										
Dimension G	19 0.75"	19 0.75"	32 1.26"											
Crosby Shackle	G2130						G2140							
Loading Pin Ø	19 3/4"	19 3/4"	25 1"	35 1 3/8"	51 2"	57 2 1/4"	57 2 1/4"	70 2 3/4"	83 3 1/4"	95 3 3/4"	121 4 3/4"	127 5"	152 6"	185 7 1/4"



Wireless Loadshackle



Features and benefits:

- Proprietary 2.4 GHz wireless
 - Error free data transmission
 - Industry Leading Wireless Range of 700m/2300ft
 - Environmentally sealed to IP67/NEMA6
 - Internal antennae
 - Remote on/off
 - Unrivalled resolution
 - Unmatched battery life of 1200hrs
 - Low headroom solution
 - Manufactured using leading brand shackles
 - Each WLS is supplied with a load-centring bobbin
 - Design validated by F.E.A.
 - Bluetooth option is available and is supplied with a free HHP App for iOS and Android
- See page 29

Available from stock in capacities 3.25t to 120t and available up to 1,550t, the WLS is manufactured from Crosby's industry leading 2130 Carbon and 2140 Alloy Bolt Type Anchor Shackles (3.25te – 120te) and the GN H10 Alloy Bolt Type Anchor Shackle (200te on up).

Straightpoint's Wireless Loadshackle provides the perfect solution to limited headroom applications. Each Wireless Loadshackle is proof tested, then equipped with a hard anodised aluminium electronics enclosure. Contained within this aluminium enclosure is a new internal chassis providing IP67/NEMA6 environmental protection even with the battery cover plate missing.

Featuring industry leading wireless technology and range of 700m/2300ft, the Wireless Loadshackle is supplied with an update rate of 3Hz and can be easily configured to run at industry leading speeds of up to 200Hz. Data is transmitted wirelessly utilising the latest in IEEE 802.15.4 (2.4 GHz) technology providing safe, high integrity, error free transmission of both static weight and dynamic load to a wireless handheld controller or wireless Windows PC data logging software package. Straightpoint's wireless data logging software allows for simultaneous control, display and real time data logging of up to 100 Straightpoint telemetry load

cells. Logged data is captured in a .csv file format and opens in MS Excel providing easy visual presentation, analysis of logged data, and simple test certificate generation.

The Wireless Loadshackle may also be used with Straightpoint's SW-PTP software package allowing the operator to perform load tests at a safe distance and generate real time test certificates on site.

Straightpoint's Wireless Loadshackle utilises easily sourced AA alkaline batteries and features advanced circuitry designed to protect the unit from damage associated with incorrectly installed batteries. This advanced circuitry extends battery life and the use of easily sourced alkaline batteries eliminates issues associated with rechargeable battery pack charging, failure and replacement. Straightpoint's huge range of tooling allows the engineers to calibrate in shackle for extra accuracy unlike many other load cell manufacturers.

A full array of wireless accessories are also available including signal boosters, LED wireless scoreboards and base stations with analogue (4-20mA, 0-10v, 0-5v) or digital (RS232/485, Modbus RTU, and ASCII serial communications protocol) outputs. There is no better choice than Straightpoint's Wireless Loadshackle for limited headroom applications.



making the lifting industry a safer place

Also available with
hazardous area approval



ATEX / IECEx

Ex ia II C T4 Ga

Certification numbers:


WLS ATEX

IECEx SIR 16.0041X / Sira 16ATEX2108X

SW-HHP ATEX

IECEx SIR 15.0072X / Sira 15ATEX2196X

**Add 'ATEX' to the part number
when ordering ATEX/IECEx products.
For example: WLS3.25T-ATEX**

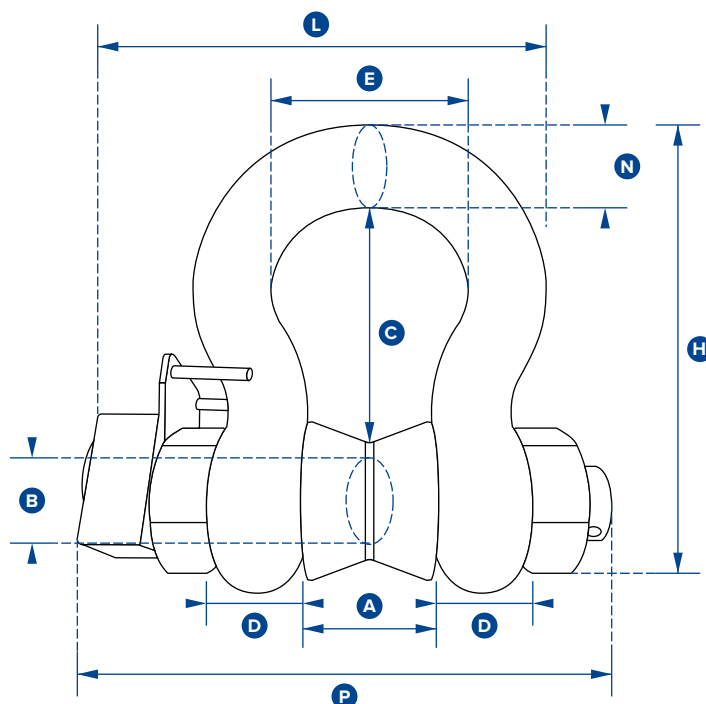

Part Number	WLS3.25T	WLS6.5T	WLS12T	WLS25T	WLS55T	WLS85T	WLS120T	WLS200T	WLS300T	WLS400T
Capacity	3.25te 7150lb	6.5te 14300lb	12te 26400lb	25te 55000lb	55te 120000lbs	85te 185000lbs	120te 260000lbs	200te 440000lbs	300te 660000lbs	400te 880000lbs
Resolution	0.005te 10lb	0.005te 10lb	0.01te 20lb	0.02te 50lb	0.05te 100lb	0.05te 100lb	0.1te 200lb	0.2te 200lb	0.5te 1000lb	0.5te 1000lb
Units	tonne lb									
Weight	2.8kg 6.16lb	3.2kg 7lb	8kg 17.6lb	18kg 40lb	25kg 55lb	45kg 99lb	85kg 187lb	254kg 560lb	374kg 825lb	614kg 1354lb
Safety Factor	5:1 when used with load bobbin									
Battery Type	Load cell 4 x AA Alkaline									
Battery Life	Load cell 1,200 hours continuous									
Operating Temp	-10°C to +50°C / 14°F to 122°F									
Accuracy	±1% of applied load									
Frequency	2.4 GHz									
System Range	700 metres / 2300 feet (100 metres / 328 feet if Bluetooth)									
Data Rate	3 updates per second									
Protection	IP67 / NEMA 6									
Dimension A	26.9 1.06"	36.6 1.44"	51.5 2.03"	73 2.87"	82.5 3.25"	105 4.13"	127 5.00"	180 7.09"	205 8.07"	230 9.06"
Dimension ØB	19.1 0.75"	25.4 1.00"	35.1 1.38"	51 2.01"	57 2.24"	70 2.76"	82.5 3.25"	125 4.92"	150 5.91"	175 6.89"
Dimension C	56.9 2.24"	79.7 3.14"	113 4.45"	170 6.69"	189.5 7.46"	253 9.96"	319.5 12.58"	483 19.02"	576 22.68"	650 25.59"
Dimension D	16 0.63"	22.4 0.88"	31.8 1.25"	44.5 1.75"	51 2.01"	66.5 2.62"	76 2.99"	120 4.72"	130 5.12"	165 6.50"
Dimension E	42.9 1.69"	58 2.28"	82.5 3.25"	127 5.00"	164 6.46"	184 7.24"	200 7.87"	290 11.42"	305 12.01"	325 12.80"
Dimension H	106 4.17"	148 5.83"	210 8.27"	313 12.32"	348 13.70"	453 17.83"	546 21.50"	810 31.89"	950 37.40"	1100 43.31"
Dimension L	127.1 5.00"	156.5 6.16"	196 7.72"	281 11.06"	306 12.05"	368 14.49"	408 16.06"	580 22.83"	615 24.21"	705 27.76"
Dimension N	17.5 0.69"	24.6 0.97"	35.1 1.38"	57 2.24"	61 2.40"	79 3.11"	92 3.62"	120 4.72"	130 5.12"	165 6.50"
Dimension P	143 5.63"	173 6.81"	218 8.58"	293 11.54"	317 12.48"	394 15.51"	441 17.36"	565 22.24"	615 24.21"	711 27.99"



Wireless Low Headroom Link



Features and benefits:

- Low headroom
 - Range from 1t to 30t
 - Lightweight and portable
 - Accepts standard shackles
 - Constructed from high strength alloy steel
 - Proprietary 2.4 GHz wireless
 - Industry leading wireless range of 700m or 2300ft
 - Error free data transmission
 - Environmentally sealed to IP67 or NEMA 6
 - 90db Audible overload alarm
 - Unmatched battery life of 1200 hours
 - Internal antennae
 - Remote on-off
 - Bluetooth option is available and is supplied with a free HHP App for iOS and Android
- See page 29

The versatile WDB is supplied with an update rate of 3 Hz and can be easily configured to run at industry leading speeds of up to 200 Hz.

Data is transmitted wirelessly utilising the latest in IEEE 802.15.4 (2.4 GHz) technology providing safe, high integrity, error free transmission of both static weight and dynamic loads to Straightpoint's SW-HHP wireless handheld display or up to 100 WDB load cells may be connected to our SW-MWLC multi load cell data logging software.

Environmentally sealed in an aerospace aluminium enclosure and sealed to IP67 or NEMA 6 the WDB utilises easily sourced AA alkaline batteries and features advanced circuitry designed to protect the unit from damage associated with incorrectly installed batteries.

This advanced circuitry extends battery life and the use of easily sourced alkaline batteries eliminates issues associated with rechargeable battery pack charging, failure and replacement.


Now available as a wireless product the Straightpoint range of Low Headroom Links are designed to provide accurate measurement of loads in the most challenging applications where headroom restrictions are a major factor.

Constructed from high strength alloy steel and exposed to an array of testing during development, this impressive range of load cells is designed to work with industry standard shackles from manufacturers such as Crosby and Van Beest. Applications include weighing, lifting, force measurement and load monitoring of structures such as lighting trusses, hoist mountings and fly line tensioning.

The unique low headroom design combines the ability to lift loads with capacities up to 30t and features industry leading wireless technology and range of 700m or 2300ft.



making the lifting industry a safer place

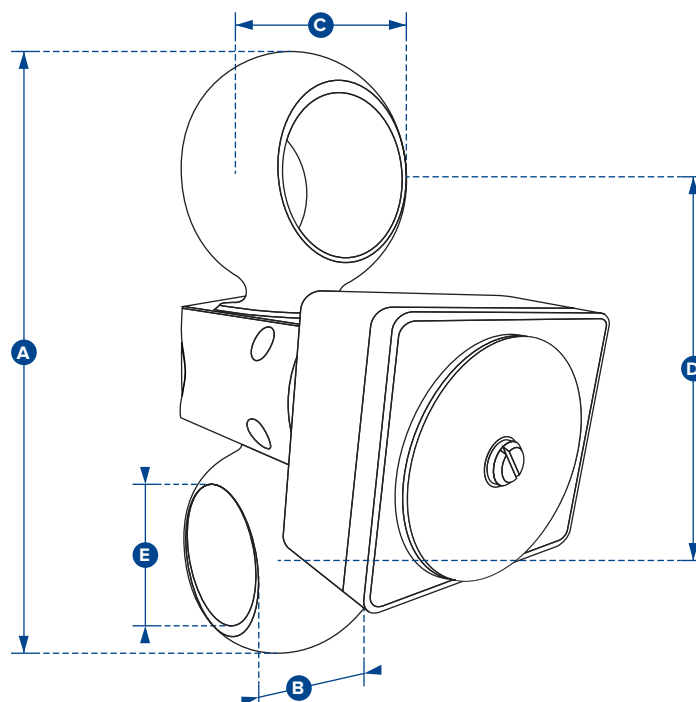

Part Number	WDB1T	WDB3T	WDB5T	WDB10T	WDB20T	WDB30T
Capacity	1000kg 2200lb	3te 6600lb	5te 11000lb	10te 22000lb	20te 44000lb	30te 66000lb
Resolution	0.5kg 1lb	0.001te 2lb	0.001te 2lb	0.002te 4lb	0.005te 10lb	0.005te 10lb
Units	tonne lb					
Weight	1kg 2.2lb	1.2kg 2.6lb	2kg 4.4lb	2.5kg 5.5lb	4kg 8.8lb	6.2kg 13.7lb
Safety Factor	5:1					
Battery Type	Load cell 4 x AA Alkaline					
Battery Life	Load cell 1,200 hours continuous					
Operating Temp	-10°C to +50°C / 14°F to 122°F					
Accuracy	± 0.3% of applied load					
Frequency	2.4 GHz					
Range	700 metres / 2300 feet (100 metres / 328 feet if Bluetooth)					
Data Rate	3Hz up to 200Hz					
Protection	IP65 / NEMA 4X					
Dimension A	110 4.33"	129 5.08"	165 6.50"	205 8.07"	249 9.80"	248 9.76"
Dimension B	18 0.71"	25 0.98"	33 1.30"	41 1.61"	66 2.60"	58 2.28"
Dimension C	33 1.30"	35 1.38"	50 1.97"	63 2.48"	90 3.54"	87 3.43"
Dimension D	74 2.91"	88 3.46"	111 4.37"	135 5.31"	153 6.02"	150 5.91"
Dimension ØE	18 0.71"	21 0.83"	27 1.06"	37 1.46"	53 2.09"	44 1.73"
Crosby Shackle	G2130-2T	G2130-3.25T	G2130-6.5T	G2130-12T	G2130-25T	G2140-30T



Features and benefits:

- Rounded edges to cheek plates maintain low rope abrasion when rope is fed 'unfair'
- Upper sheave opens via a threaded locking axle for added security
- Thrust surfaces increase tolerance to external loading of spindle and anchor pin
- Lightweight attachment sling facilitates hauling of block, sling and rope to the climber and helps with handling, in tree stowage and workshop storage
- Direct connection to cordage, the anchor slings helps ensure correct neighbour component compatibility
- 700m or 2300ft wireless range enabling operator to stand at safe distance
- No easily broken external antennae
- High waterproof resistance to IP67/NEMA6 for all weather use
- Massive battery life of 1200 hours operational time
- Handheld display or data logging software options for all applications
- Bluetooth option is available and is supplied with a free HHP App for iOS and Android
See page 29

The safest choice for the working Arborist.


Manufactured in partnership with DMM, the Impact Block has been designed to deliver the best performance in terms of alignment, resistance and appeal.

The aesthetic curves of the Impact Block combines beauty, strength and durability to ensure a rope friendly surface. Coupled with wireless dynamic load monitoring electronics and strain gauge technology from Straightpoint and providing real time data to either handheld controller or logging via our SW-MWLC software to tablet or laptop, it is easy to see why this is one of the most sought after products in the industry.

During development, the Straightpoint Impact Block has gone through a thorough dynamic and static validation testing regime. The end result is a highly functional product with an impressive strength to weight ratio.

Applications:


- Tree care – dismantling ops and speed lines
- Forestry
- Winching operations
- Rescue
- Rigging
- Entertainment industry

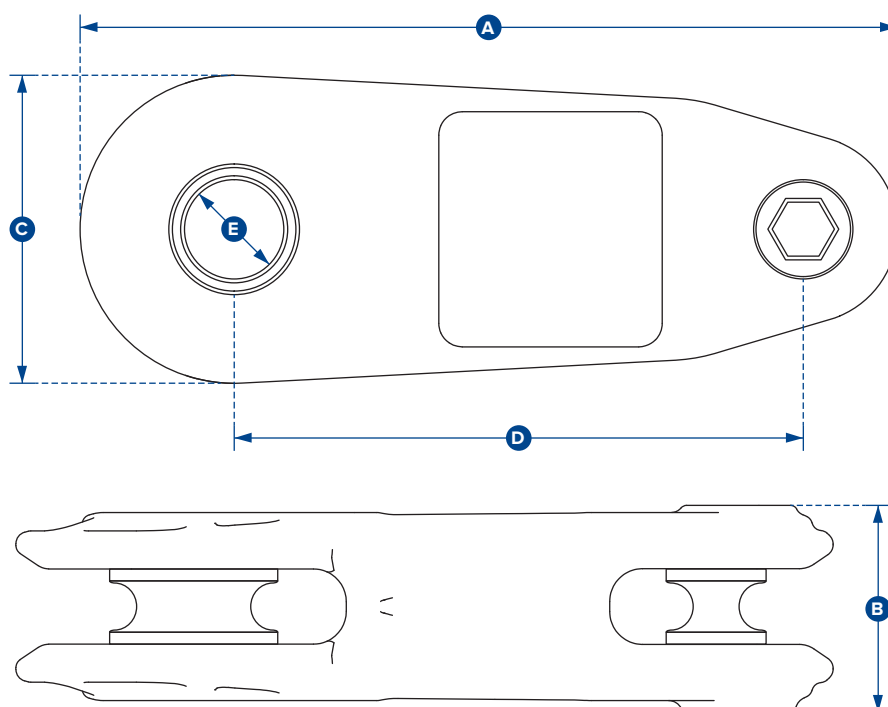

Part Number	WIB6T
Capacity	60kN
Resolution	0.1kN
Units	kN
Weight	6kg
	13.2lb
Safety Factor	5:1
Battery Type	4 x AA Alkaline
Battery Life	1,200 hours continuous
Operating Temp	-10°C to +50°C / 14°F to 122°F
Accuracy	±0.3% of applied load
Frequency	2.4 GHz
System Range	700 metres / 2300 feet (100 metres / 328 feet if Bluetooth)
Data Rate	50Hz - up to 200Hz can be ordered for dynamic load monitoring applications
Protection	IP67 / NEMA 6
Max Rope Ø	20mm
	0.75"
Dimension A	348
	13.7"
Dimension B	89
	3.5"
Dimension C	131
	5.16"
Dimension D	242
	9.53"
Dimension ØE	27
	1.06"



Wireless Compression Load Cell

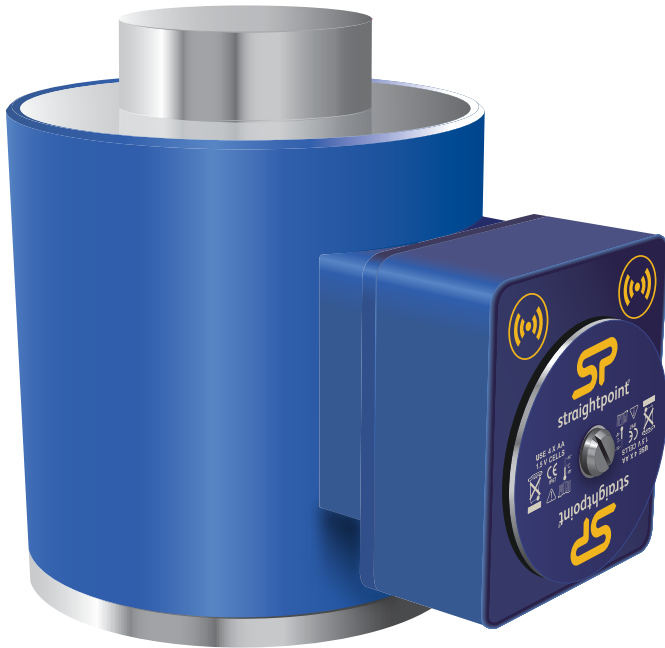

Features and benefits:

- Proprietary 2.4 GHz wireless
- Industry leading wireless range of 700m/2300ft
- Connects to SW-MWLC, WCOGS & SW-PTP software
- Error free data transmission
- Internal antennae
- Environmentally sealed to IP67/NEMA 6
- No cable assemblies required
- Unrivalled resolution
- Unmatched battery life of 1200hrs
- Reduced maintenance cost
- Compact size
- Remote on-off
- Design validated by F.E.A.
- Bluetooth option is available and is supplied with a free HHP App for iOS and Android
See page 29

The Straightpoint Wireless Compression Load Cell is taking the heavy lift and structural weighing industry by storm. By adding the Straightpoint wireless system to the already popular compression load cell line we have developed a cost-effective alternative to standard compression load cells.

No longer hindered by troublesome and hard to maintain cables, large scale projects can be completed in a fraction of time previously required. Maintenance costs are all but eliminated due to the absence of cables and connectors, and the products flexibility opens the door to a large number of applications in the heavy lift, energy, defence, rigging, shipping, and general transportation sectors, previously not considered.

Straightpoint's Wireless Compression Load Cells are machined from high grade stainless steel, providing excellent strength and corrosion resistance. The heavy duty, compact load cell utilises Straightpoint's advanced microprocessor based electronics and benefits from unrivalled resolution and accuracy. Data transmission is handled by the Straightpoint wireless systems proprietary transport protocol, is unmatched in performance and capable of a licence free transmission range of up to 700 metres or 2300 feet.

It is not until you add the powerful array of wireless accessories that the full potential of this product is realised. These accessories which include a wireless signal booster and several user friendly Windows-based software packages, provide a level of flexibility not previously known in the load monitoring industry.

When used with Straightpoint's WCOGS software these load cells will calculate centre of gravity and load. Connected to SW-MWLC it will allow the ability to data log and print reports, allowing the simultaneous display and monitoring of up to 100 wireless compression load cells on your PC or tablet. Lastly, coupled with Straightpoint's SW-PTP software the operator can perform load tests at a safe distance and generate real time test certificates on site.



making the lifting industry a safer place

Also available with
hazardous area approval



ATEX / IECEx

Ex ia II C T4 Ga

Certification numbers:


WNI ATEX

IECEx SIR 16.0041X / Sira 16ATEX2108X

SW-HHP ATEX

IECEx SIR 15.0072X / Sira 15ATEX2196X


**Add 'ATEX' to the part number
when ordering ATEX/IECEx products.
For example: WNI5TC-ATEX**

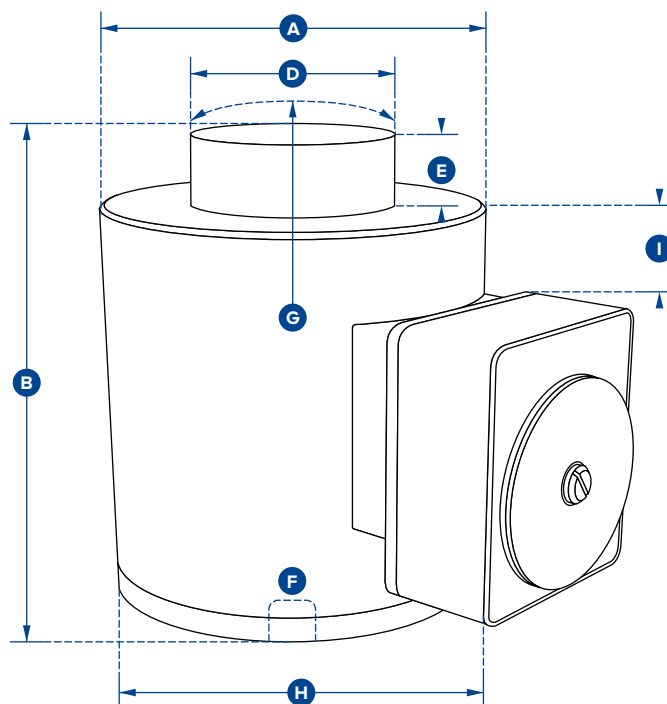

Part Number	WNI5TC	WNI10TC	WNI25TC	WNI50TC	WNI100TC	WNI150TC	WNI300TC	WNI500TC	WNI1000TC
Capacity	5te	10te	25te	50te	100te	150te	300te	500te	1000te
	11000lb	22000lb	55000lb	110000lb	220000lb	330000	660000lb	1100000lb	2200000lb
Resolution	0.001te	0.002te	0.005te	0.01te	0.05te	0.05te	0.1te	0.2te	0.5te
	2lb	5lb	10lb	20lb	100lb	100lb	200lb	500lb	1000lb
Units	tonne								
	lb								
Weight	6.2kg	6.2kg	6.2kg	6.2kg	15.5kg	15.5kg	65kg	65kg	172kg
	13.64lb	13.64lb	13.64lb	13.64lb	34lb	34lb	143lb	143lb	379lb
Safety Factor	3:1								
Battery Type	Load cell 4 x AA Alkaline								
Battery Life	Load cell 1,200 hours continuous								
Operating Temp	-10°C to +50°C / 14°F to 122°F								
Accuracy	±0.3% of applied load								
Frequency	2.4 GHz								
System Range	700 metres / 2300 feet (100 metres / 328 feet if Bluetooth)								
Data Rate	3Hz (configurable to 200Hz)								
Protection	IP67 / NEMA 6								
Dimension ØA	102	102	102	102	152	152	185	185	362
	4.02"	4.02"	4.02"	4.02"	5.98"	5.98"	7.28"	7.28"	14.25"
Dimension B	127	127	127	127	184	184	300	300	310
	5.00"	5.00"	5.00"	5.00"	7.24"	7.24"	11.81"	11.81"	12.20"
Dimension ØD	59	59	59	59	80	80	155	155	270
	2.32"	2.32"	2.32"	2.32"	3.15"	3.15"	6.10"	6.10"	10.63"
Dimension E	16	16	16	16	26	26	27.5	27.5	40
	0.63"	0.63"	0.63"	0.51"	1.02"	1.02"	1.08"	1.08"	1.57"
Dimension F	M18 x 2.5	M18 x 2.5	M18 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M30 x 3.5
	M18 x 2.5	M18 x 2.5	M18 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M30 x 3.5
Dimension G	152	152	152	152	432	432	432	432	950
	5.98"	5.98"	5.98"	5.98"	17.01"	17.01"	17.01"	17.01"	37.40"
Dimension H	158	158	158	158	208	208	241	241	422
	6.22"	6.22"	6.22"	6.22"	8.19"	8.19"	9.49"	9.49"	16.61"
Dimension I	8	8	8	8	33	33	49	49	102
Loadcell top to SA700 top	0.31"	0.31"	0.31"	0.31"	1.30"	1.30"	1.93"	1.93"	4.02"



Clamp On Line Tensionmeter

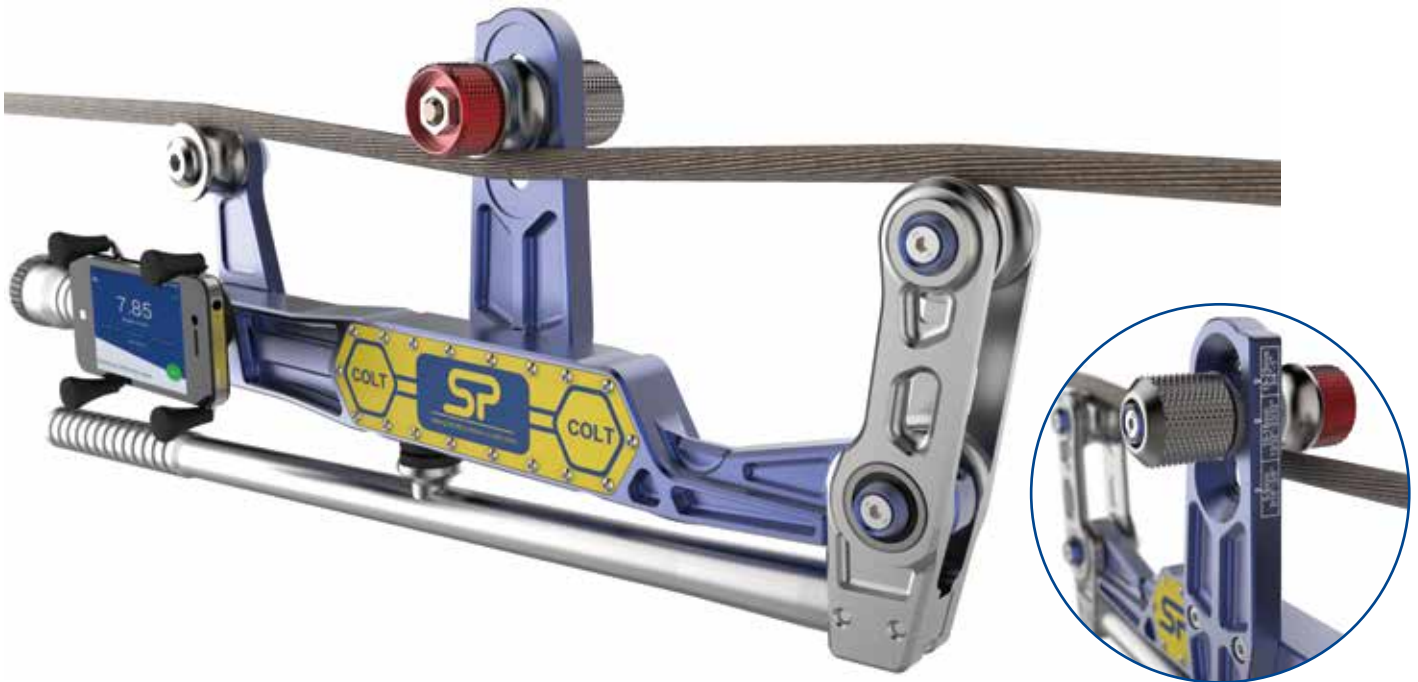

The Straightpoint COLT is a lightweight tensionmeter for fast and accurate measurement of wire rope tensions up to 11,000lbf/5000 kgf and up to 1"/25mm diameter.

Manufactured using an integral, high accuracy, Bluetooth module the COLT transmits load data wirelessly to any smart device running our Android or iOS app.

As the library of wire rope diameters and constructions is increased each app user will benefit when they update and receive any new data.

A useful data-logging feature within the app allows the operator to log changes in tension v time and date if required; this data can then be emailed or uploaded to the cloud straight from the smart device in use.

Constructed from aerospace grade aluminium the COLT digital tensionmeter is lightweight and easy to handle and operates on wires that are already under tension.

Once in place it allows the operator to quickly check tension on cables or wire ropes set at any angle.

A built in smart device holder allows the COLT to be used as a traditional tension meter with on board display or the smartphone maybe handheld or mounted elsewhere.

Supplied in a purpose made carry case the COLT is portable and utilises standard alkaline batteries making this perfect for on-site cable tension measurement across the world.

Features and benefits:


- Unlimited wire rope calibration database via Android or iOS app
- Main swivel joints fitted with high quality bearings
- Lever ratio of 5.3:1 allows effortless, safe, clamping onto pre-tensioned wire ropes
- Wireless Bluetooth, enabling operator to stand at safe distance if needed
- Quick intuitive adjustable centre sheave makes changing wire rope sizes fast and easy
- No easily broken external antennae
- High waterproof resistant design for all weather use
- Massive battery life of 1000 hours operational time




making the lifting industry a safer place

Applications:

- Guy wire maintenance on cell towers, bridges, stacks, antennas and masts
- Wire rope installations, comparing, equalising and measuring
- Median cable barrier tensioning
- Utility cable overhead line monitoring
- Elevator hoist, governor and compensating wire rope maintenance
- Zip lines and assault course testing
- Fall arrest systems
- Metro, tram and rail transit electric wires and catenary testing
- Ski lifts

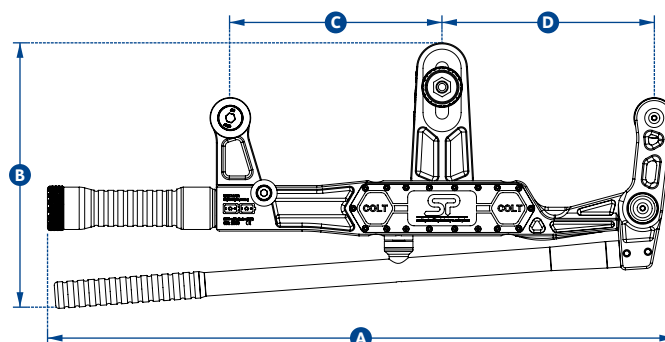

Part Number	COLT5T
Max Load	5000kg 11000lbs
Resolution	10kg 20lb
Units	kg, lbs, tonne and kN
Min Wire Rope Ø	Ø5mm Ø3/16"
Max Wire Rope Ø	Ø25mm Ø1"
Max Line Reduction	5mm with a Ø10mm wire rope 7/32" with a Ø3/8" wire rope
Wire Rope Database	Infinite via Android 4.4 or iOS 8.0 app
Weight	3.5kg 7.7lbs
Battery Type	2 x 'C' cell batteries
Battery Life	1000 hours Bluetooth transmission time
Operating Temp.	-25°C to +70°C -13°F to +158°F
Protection	IP67 NEMA 6
Accuracy	± 3% of full scale if wire rope Ø and construction known
Communication	Bluetooth 4.2
Dimension A	589mm 23.2"
Dimension B	254mm 10"
Dimension C	200mm 7.9"
Dimension D	200mm 7.9"

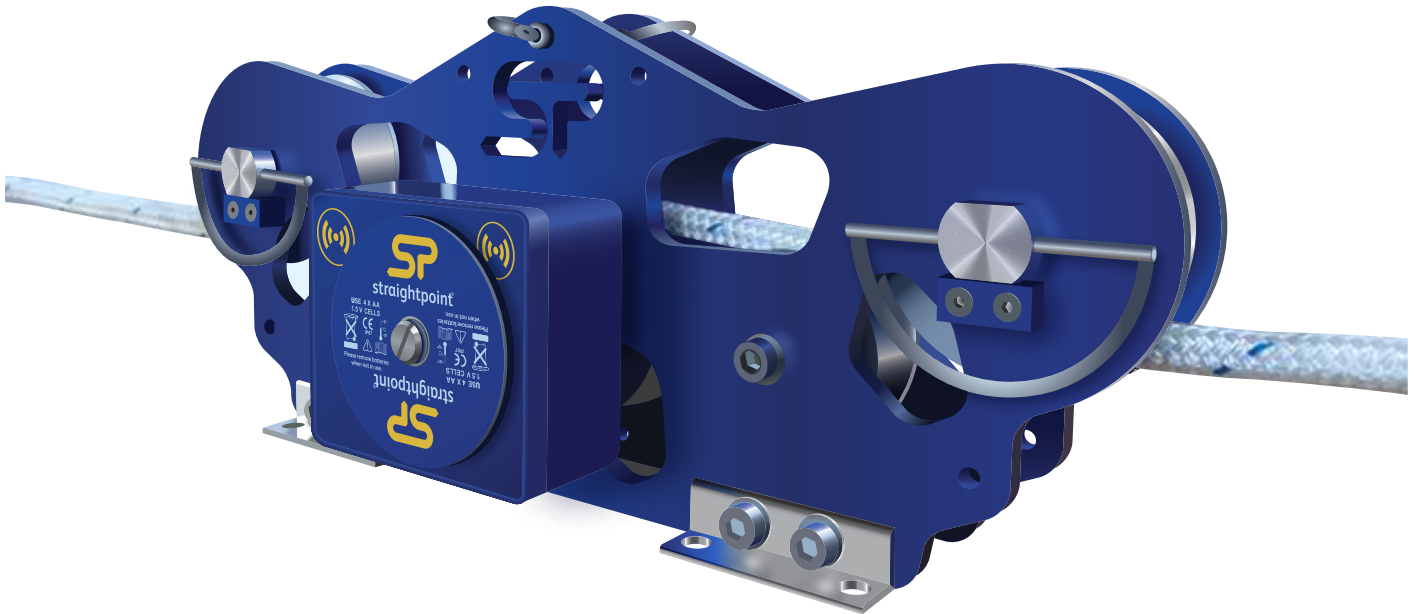

A new addition to the TIMH range, the CableSafe is the continued evolution of SP's running line tensiometers. When used in the field, it will allow the user to monitor tension with exceedingly high levels of accuracy, which ensures that rope/cables do not become overstretched or break. Using CableSafe on cable pulls reduces liabilities on cable installations.

When using a capstan winch to unwind electrical cable from a reel/spool, you will be able to Integrate the CableSafe within this setup to ensure that it is being pulled at a safe tension level. This helps the line maintain its transmissions capability, prevent it becoming a fire hazard risk, and it also stops the need of furthering work in order to remove and replace it. The contractor is gifted with decreased liability and dramatically increased peace of mind.

Another example of best use is during the installation of cell phone towers or similar delicate structures. You will be able to use the product to help ensure structure-to-ground ropes, connected to a gin pole and pulley system, do not exceed maximum tension whilst lifting sections of the tower to the top. There can be the possibility of the rope becoming snagged and cause greater tension to be loaded upon the system. With heavy materials being lifted to great heights; this would create a major safety hazard leading to a catastrophic failure with the endangerment of lives. Avoid the unknown through accurate monitoring, especially when risks are high.

What distinguishes it apart from previous versions of this type is the developed lightweight design that allows for easy transportation and usage. It also provides up to 500 hours battery life so that you can be assured that it won't lose power before your work day has ended. The high level IP67/NEMA 6

ingress protection allows the product to be used in a variety of heavy weather conditions and dusty environments. These features, as a collective, means that it will be an invaluable and reliable tool in your work related armoury.

The five wheel design and gravity catches with top sheave pins allows for fast and simple rope attachment setup. The accuracy is also improved over three wheel alternatives.

When used with a cable/rope pulling device you can remotely monitor the tension on the line using your smart handheld device via a Bluetooth connection*. You will be able to locate yourself up to 50m/164ft away from the CableSafe to allow you to survey job progress from a distance.


**The 'HHP' app is available to download for free (Android/iOS) and is compatible with all SP wireless products.*

Applications:

- Fibre optic cable pulling using turret winches
- Water gates for dams
- Offshore rescue and retrieval
- Capstan rope/cable winding
- Broadcast and telecommunications
- Erecting towers (maintaining structural capacity)
- Service and maintenance of cell towers

Features and benefits:


- Simple to use and setup
- Remote monitoring using smart phone via Bluetooth
- Rapid tension force measurement - Up to 50m/164ft per minute
- Able to be used in all weather and air quality conditions
- Easy to install and replace batteries (4 x AA standard Alkaline)
- Fully constructed from light and durable hard Anodised Aluminium
- Five wheel design improving accuracy (clear anodised)
- Linchpins are fitted to the top sheave pins making wire rope installation quick and simple
- Maintenance free heavy duty needle bearings
- Compatible with a wide range of rope circumferences – 4-19mm/0.16" - 0.75"
- Design validated by F.E.A.
- IP67 ingress protection / NEMA 6 – heavy protection against dust and rain

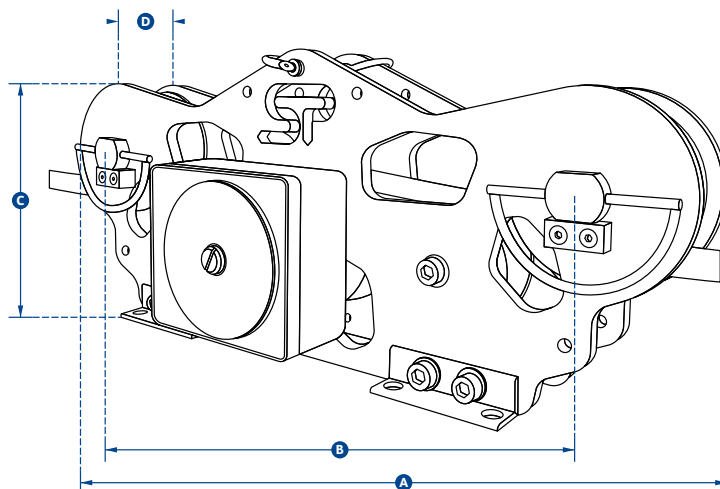

Part Number	CS10T
Capacity	10te
	22,000lb
Resolution	0.01te
	20lb
Rope Ø	4-19mm
	5/32" - 3/4"
Weight	4.5kg
	10lb
Battery Type	4 x AA Alkaline
Battery Life	500hrs
Operating Temp	-10°C to +50°C / 14°F to 122°F
Accuracy	2% F.S.
Range	Bluetooth 100m / 328ft
Protection	IP67 / NEMA 6
Maximum Speed	50m per minute / 164ft per minute
Dimension A	422mm
	16.60"
Dimension B	330mm
	13"
Dimension C	152mm
	6"
Dimension D	36mm
	1.4"



Running Line Dynamometer

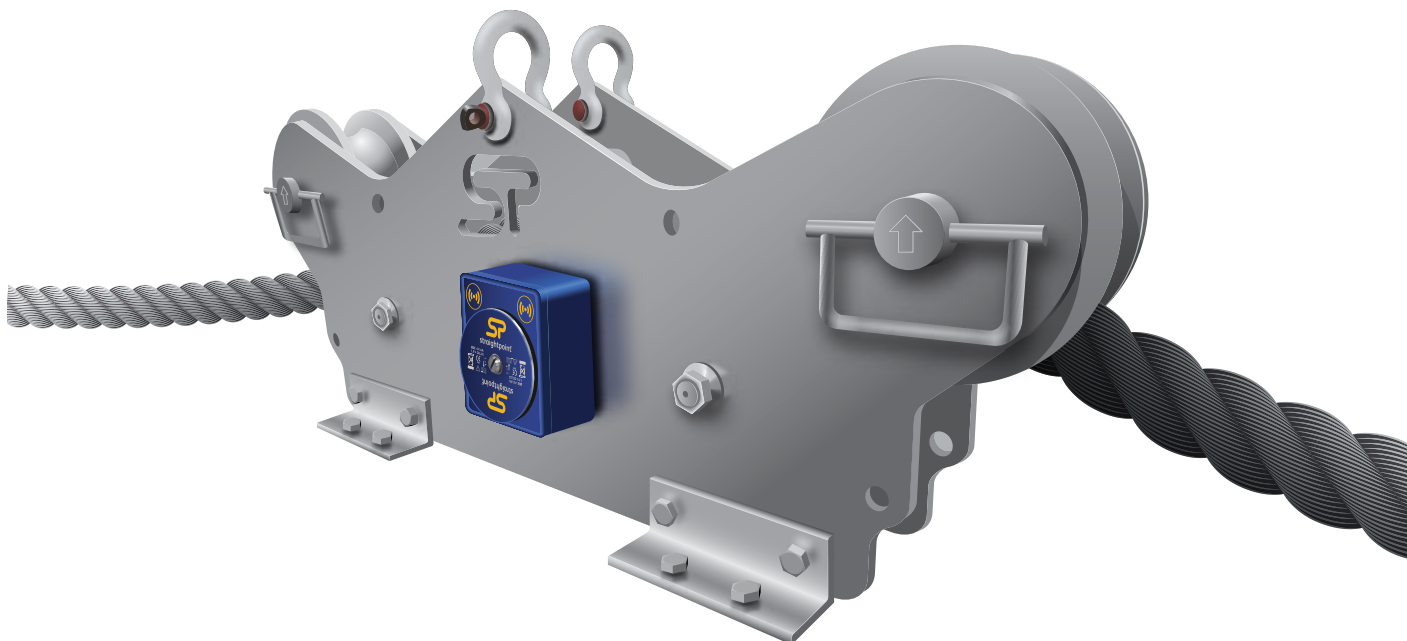

The TIMH range is a Running Line Tensiometer or RLTM built with dockside, marine, offshore, towage and salvage applications in mind.

It is particularly useful where there is no anchor or dead end on the line to rig a Straightpoint Radiolink or Loadlink digital dynamometer to measure tension force at speeds up to 20m/min or 65ft/min.

The TIMH is constructed from marine grade stainless steel and is suitable for many wire rope configurations up to 80t and will, as an option, calculate lineout in metres or feet.

The TIMH has several mounting points featured in its unique design but if other mounting options are required Straightpoint can provide a custom engineered solution specific to your application.

Available as a wireless or cabled system utilising Straightpoint's HHP range of handheld displays or SW-MWLC software, this impressive Running Line Dynamometer or RLTM is available to ship from stock, to anywhere in the world within days.

Features and benefits:

- Five wheel design improving accuracy
- Cabled or wireless options
- Fully constructed from corrosion resistant stainless steel
- IP67/NEMA6 Loadpin
- Gravity catches fitted to top sheave pins make wire rope installation quick and simple
- Industry leading battery life of 1200hrs (wireless)
- Maintenance free heavy duty bearings
- Large range of capacities to 80t and wire rope diameters up to 52mm/2"
- Options for line out available
- Software available to data log and monitor or analogue outputs
- Design validated by F.E.A.
- Bluetooth option is available and is supplied with a free HHP App for iOS and Android
See page 29



making the lifting industry a safer place

Also available with
hazardous area approval



ATEX / IECEx

Ex ia II C T4 Ga

Certification numbers:


TIMH ATEX

IECEx SIR 16.0041X / Sira 16ATEX2108X


SW-HHP ATEX

IECEx SIR 15.0072X / Sira 15ATEX2196X

**Add 'ATEX' to the part number
when ordering ATEX/IECEx products.
For example: TIMH10T-ATEX**

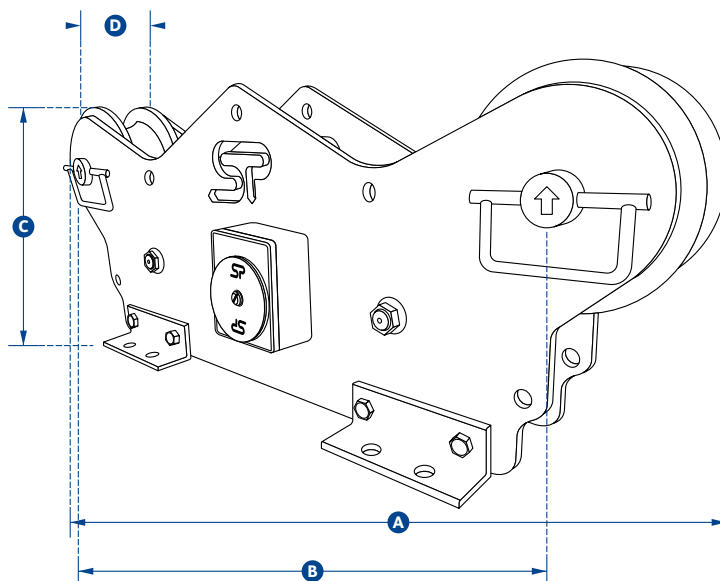

Part Number	MTIMH10T	TIMH10T	TIMH25T	TIMH56T	TIMH80T	TIMH150T
Capacity	10te	10te	25te	56te	80te	150te
	22000lb	22000lb	55000lb	123200lb	176000lb	330000lb
Resolution	0.01te	0.01te	0.02te	0.05te	0.1te	0.2te
	20lb	20lb	50lb	100lb	200lb	500lb
Wire Rope Ø	4-19mm	13-19mm	16-26mm	28-38mm	40-52mm	52-89mm
	5/32" - 3/4"	1/2" - 3/4"	5/8" - 1"	1 1/8" - 1 1/2"	1 5/8" - 2"	2" - 3 1/2"
Weight	9kg	76kg				
	20lbs	168lb				
Battery Type	4 x AA Alkaline					
Battery Life	1200hrs continuous					
Operating Temp	-10°C to +50°C / 14°F to 122°F					
Accuracy	2% F.S.					
Frequency	2.4 GHz					
System Range	700 metres / 2300 feet (100 metres /328 feet if Bluetooth)					
Data Rate	3 updates per second					
Protection	IP67 / NEMA 6					
Maximum Speed	25m per minute / 65ft per minute					
Dimension A	422mm	880mm				1250mm
	16.62"	34.65"				49.21"
Dimension B	330mm	700mm				1050mm
	13"	27.55"				41.33"
Dimension C	152mm	330mm				416mm
	5.98"	12.99"				16.37"
Dimension D	36mm	110mm				153mm
	1.4"	4.33"				6.02"

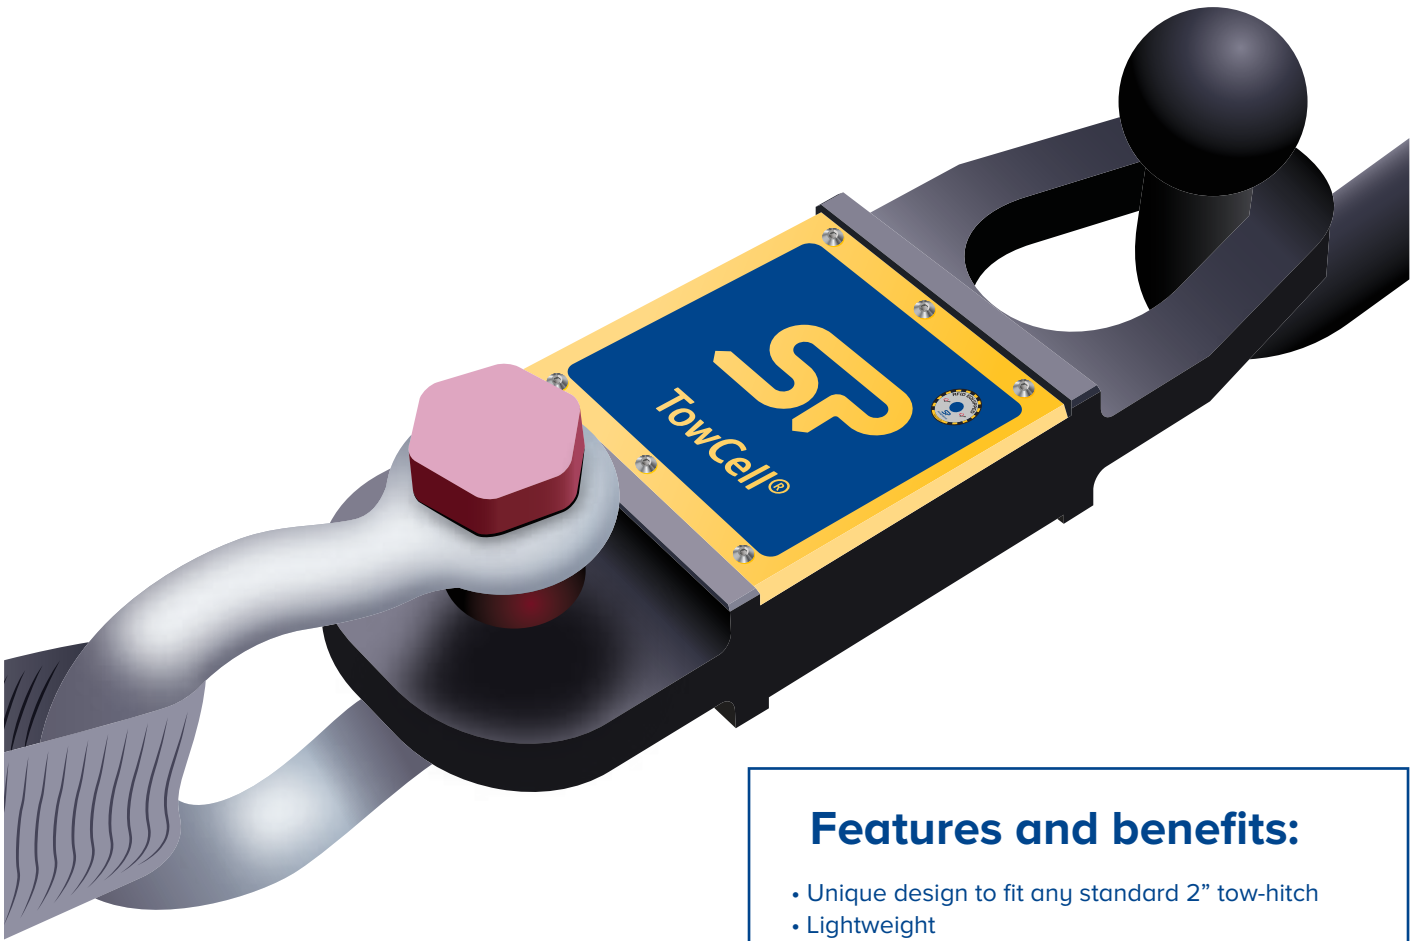

Straightpoint has developed a 25kN, wireless load cell specifically engineered for the emergency services, salvage and 4 x 4 industries. The Towcell® allows for increased safety and the avoidance of costly overloads by providing real-time monitoring of tensile towing forces during recovery, clearance and salvage efforts. The Towcell® is rugged, lightweight, compact and can be installed, with ease, onto any tow bar, whether it's a standard 52mm or 2" ball or pin assembly and is ready to use in seconds.


Modelled after Straightpoint's best-selling Radiolink plus, the Towcell® is constructed of high quality aircraft grade aluminium, featuring an advanced internal design structure providing the product with an unrivalled strength to weight ratio, and allowing for the use of a separate internal sealed enclosure. This internal sealed enclosure provides the internal electronic components with IP67/NEMA 6 waterproof

Features and benefits:

- Unique design to fit any standard 2" tow-hitch
 - Lightweight
 - 90dB Audible overload alarm
 - Unmatched battery life of 1200hrs
 - Waterproof IP67/NEMA6
 - Internal antennae
 - Compact size
 - Proprietary 2.4 GHz wireless communication
 - Design validated by F.E.A.
 - Bluetooth option is available and is supplied with a free HHP App for iOS and Android
- See page 29

environmental protection even with the battery cover plate missing. Easily sourced AA alkaline batteries offer massive battery life of 1200 hours, and the Towcell® utilises an unbreakable internal antennae.

Towcell® loads can be displayed on Straightpoint's rugged and versatile SW-HHP handheld display, or viewed and simultaneously data logged with a Windows tablet via Straightpoint's SW-MWLC software package.

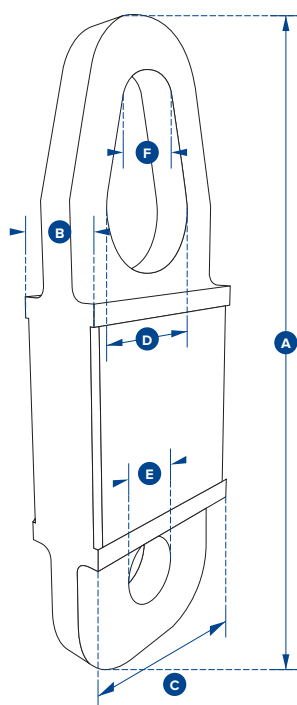

Part Number	Towcell	Towcell - Bluetooth version
Capacity	25kN	25kN
Resolution	0.01kN	0.01kN
Weight	1.4kg	1.4kg
	3lb	3lb
Safety Factor	5:1	5:1
Battery Type	4 x AA Alkaline	4 x AA Alkaline
Battery Life	1,200 hours continuous	500 hours continuous
Operating Temp	-10°C to +50°C / 14°F to 122°F	-10°C to +50°C / 14°F to 122°F
Accuracy	±0.5% of applied load	±0.5% of applied load
Frequency	2.4 GHz	-
System Range	700 metres / 2300 feet	100 metres / 328 feet
Data Rate	50Hz	50Hz
Protection	IP67 / NEMA 6	IP67 / NEMA 6
Dimension A	300mm	300mm
	11.81"	11.81"
Dimension B	43mm	43mm
	1.70"	1.70"
Dimension C	101mm	101mm
	4.00"	4.00"
Dimension ØD	51mm	51mm
	2.00"	2.00"
Dimension ØE	27mm	27mm
	1.06"	1.06"
Dimension ØF	31mm	31mm
	1.22"	1.22"




Wireless Centre of gravity system designed specifically for use when large industrial items such as absorbers, generators, turbines, reactors, boilers, towers, locomotives, boats, military equipment or offshore industry parts such as oil rigs and production platforms have to be moved. Heavy lift companies need large capacity load cells and easy to use software to quickly report weight and centre of gravity.

This latest version of Straightpoint's wireless centre of gravity system uses wireless compression load cells and new and improved, simple to use, software package. Operators can now view on screen and in real-time, up to 36 individual load cell loads, and the dynamic centre of gravity. The valuable centre of gravity analysis report can be easily saved and or printed.

Written with ISO19901 in mind this package has several benefits:

- 100% Wireless
- Between 3-36 load cells of the same capacity can be used at any one time
- ISO19901 compliant
- 700m / 2300ft range
- On screen, real time centre of gravity view
- Three weighings per report with averages and statistical analysis
- Plot load cell positioning using measurements or GPS co-ordinates
- Extra fields for operator, client, wind speed and temperature available for reporting

For many heavy lift projects there is an absence of standardisation which requires individual transport planning. With a range of tension or compression load cells and this software, Straightpoints' commitment to the heavy lift industry is second to none.

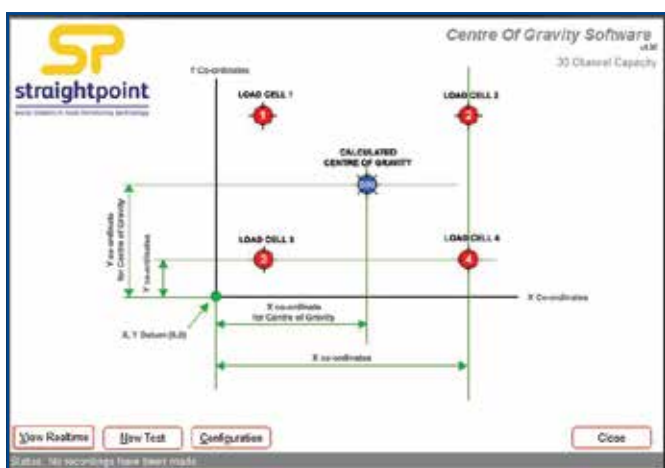

Home Screen



Report Example

Part Number	WCOGS
IP rating	IP67
(SW-USBBSE)	NEMA 6
Operating Temp	-20°C to 55°C
	-4°F to 131°F
Licence	Licence free
Frequency	2.4 GHz
Range	700 metres
	2300 feet
Load Cell Inputs	Up to 36
PC Requirements	Intel i3 processor with 2GB RAM
Operating System	Windows XP, Vista, Windows 7, 8 or 10 (must have English language regional settings selected)

Proof Test plus

straightpoint Proof Test Plus **core|rfid**
making the lifting industry a safer place

Add / Select Reference Load Cell

S/N: Model: Calibration Date: Measurement: WLL:

Select a date:

SN 1A003
Model: RUP21EU
WLL: 24,000kg
Cal Expire Date:
10 March 2017
Measurement: B

SN 81234
Model: RUP21EU
WLL: 24,000kg
Cal Expire Date:
30 March 2017
Measurement: B

SN 43234
Model: RUP21EU
WLL: 24,000kg
Cal Expire Date:
30 March 2017
Measurement: T

straightpoint Proof Test Plus **core|rfid**
making the lifting industry a safer place

Search Customer

Customer Name: Address:

Add / Select Customer

Customer Name: Address: Tel: Contact:

Customer Name:
Big Cranes Inc.
Address:
Unit 8-10, Expressway

Customer Name:
Carpenter Strong
Address:
High Street, Salford, W.

straightpoint Proof Test Plus **core|rfid**
making the lifting industry a safer place

Load Test Details

Product Desc: Serial #: WLL: Test Method:

Liftarm LTM 40 A374QSH 40t Water bag

Notes:



straightpoint Proof Test Plus **core|rfid**
making the lifting industry a safer place

Is this acceptable?

ACCEPTABLE

UNACCEPTABLE

ACME CORPORATION

Acme Lifting
New Street
Block 1
Hampshire
UK
PO20 8DA
02392 470273
www.acmelifting.com

Certificate of Load Test

Date of Test:	14 July 2018	Product Description:	Liftarm LTM 40
Certification Number:	10005	Serial or Tag No:	A374QSH
Company:	Big Cranes Inc.	WLL:	40t
Address:	Unit 8-10, Expressway, Camarillo, CA, 93012	Test Method:	Water bag
Tel:	805 234 3485	Load Test To:	40T
Contact:	Bob Friend	Duration of Test:	23.95 seconds
Reference Loadcell:	RUP21T	Notes:	4mph north easterly wind
Serial Number:	81234	Calibrated On:	6 August 2015
		WLL:	40t

Peak Load: 9.68 T

LOAD (T)

This is to certify that the product described herein has been subjected to the load test.
Caution: Never exceed the rated capacities.

Signed: Rob Burgess

Appointed Person: Rob Burgess ID: DA1234 LEBA Team card 0087



making the lifting industry a safer place

Numerous load testing applications worldwide require a load cell to verify the load applied. From crane testing using water bags to pad eye testing using hydraulic tools, the need to document test procedure and results has never been greater as users of lifting equipment call for more traceability and audit trails.

A proof test is a form of stress test to demonstrate the fitness of a load-bearing structure and is nominally a non-destructive test. Such a structure is often subjected to loads above that expected in normal use, demonstrating safety and design margin.

This demand has increased such that Straightpoint now offer a new software package designed to connect to any of their wireless load cells - 'Prooftest plus'. This impressive package allows the test engineer to wirelessly, and at a safe distance, monitor a proof load test and automatically create a pass or fail certificate when testing is complete. This report in PDF format may then be printed, emailed or uploaded to the cloud, resulting in a traceable document for both test engineer and end customer.


Typical load tests using Straightpoint load cells include:

- Bollard pull tests
- Tug tests
- Crane Test (Water bags, block weights)
- Pad eye or fly point testing
- Crash barrier testing
- Lifting equipment testing - Slings, chains, wire rope, hooks
- Construction equipment testing - Shoring columns, acrow props and lintels
- Lifting and spreader beam testing
- Hydraulic cylinder load test




Features and benefits:

- 100% Wireless, no easily damaged cables
- 700m/2300ft range allows operator to stand at safe distance from test
- Log data at speeds up to 200Hz
- Connects to any Straightpoint wireless load cell
- Automatically creates digitally signed pass or fail certificate
- Real time load v time graph display
- Free entry fields to note wind speed, sea states etc.

Part Number		SW-PTP
IP rating	(SW-USBSE)	IP67
		NEMA 6
Operating Temp		-20°C to 55°C
		-4°F to 131°F
Licence		Licence free
Frequency		2.4 GHz
Range		700 metres
		2300 feet
Load Cell Inputs		1
PC Requirements		Intel i3 processor with 2GB RAM
Operating System		Windows XP, Vista, Windows 7, 8 or 10

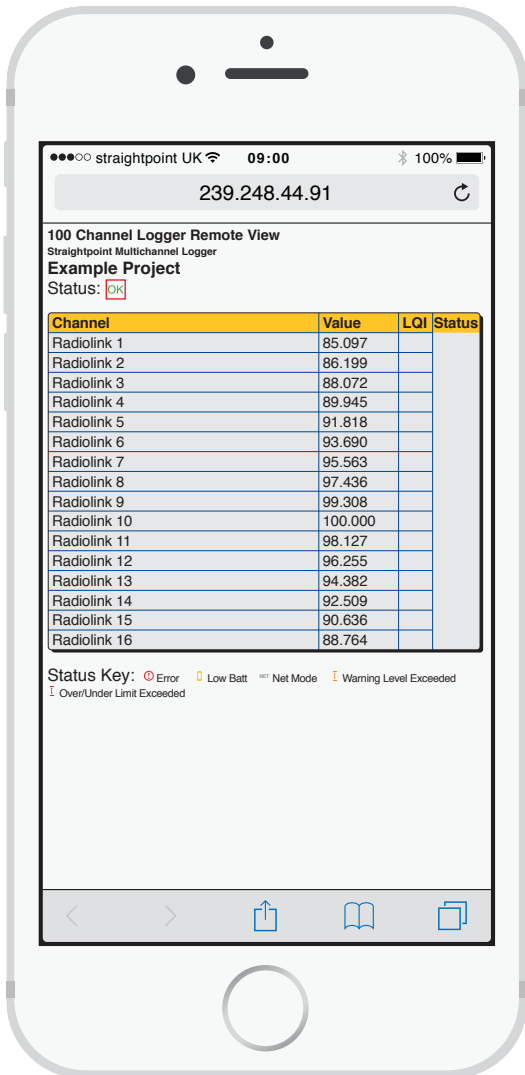

Date	Time	Elapsed mS	Radiolink 1	Radiolink 2	Radiolink 3	Radiolink 4	Total Load
10/03/2015	10:41:38	1000	0.01	0	0	0.02	0.03
10/03/2015	10:41:39	2000	0.23	0.16	0.03	0.59	0.73
10/03/2015	10:41:40	3000	3.04	0.16	1.6	2.23	14.17
10/03/2015	10:41:41	4000	5.3	0.94	1.6	7.62	32.45
10/03/2015	10:41:42	5000	5.5	1.9	1.6	8.1	36.72
10/03/2015	10:41:43	6000	8.39	4.09	4.42	9.87	46.37
10/03/2015	10:41:44	7000	9.99	5.11	6.26	12.13	62.56
10/03/2015	10:41:45	8000	11.8	6.43	7.43	19.14	72.8
10/03/2015	10:41:46	9000	11.79	6.2	6.18	17.06	73.85
10/03/2015	10:41:47	10000	8.01	2.43	2.3	12	52.72
10/03/2015	10:41:48	11000	4.94	0.02	0.01	6.09	32.69
10/03/2015	10:41:49	12000	0.06	0.01	0	4.08	15.19
10/03/2015	10:41:50	13000	0	0	0	0	-3.53

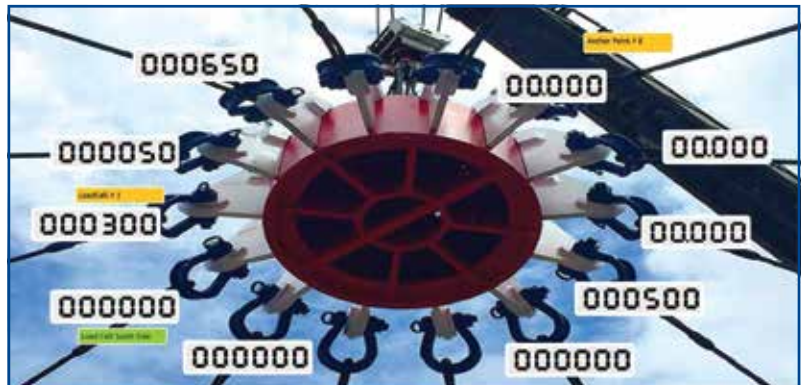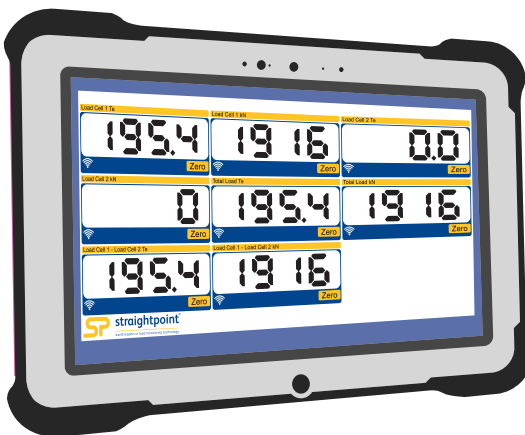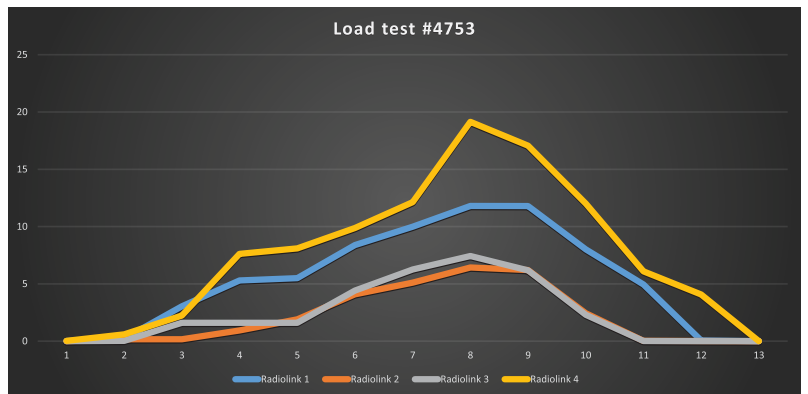

Straightpoint's Multiple Wireless Load Cell Controller (SW-MWLC) software package is a versatile, user friendly, wireless load cell control, display and data logging tool designed for use on the Windows PC platforms, Vista, Win 7, 8 & 10.

SW-MWLC allows simultaneous, wireless communication between Straightpoint wireless load cells and a Windows PC. A resizable window displays a table of up to 100 wireless load cell channels of live data. Channels can be setup with user defined mathematical functions that can be used to calculate a multitude of results.

For example, a display can show the value from a single load cell or the sum of multiple load cells. Visual display and audio alarms can indicate under and over range as well as loss in communications, low battery and error reports. SW-MWLC can log on demand, at pre-set intervals, on entering and leaving a pre-set overload and during an overload. Data is logged to a CSV file which can be opened for analysis by software programs such as Microsoft Excel. JSON format data is also available on demand via the built in web server.

For more complex applications, graphical pages can be built showing the data in a variety of formats including digital display or bar graphs. Up to eight pages can be defined and the pages easily navigated between a variety of image formats that can be imported, including JPG, GIF, PDF and DXF.

Custom applications including branding and colour scheme are available. Please contact Straightpoint's sales department for pricing.

SW-MWLC software is supplied with a SW-USBBSE extended range USB transceiver.

Features and benefits:

- Displays and logs data up to 100 Straightpoint wireless load cells simultaneously
- Mapping/graphical capabilities
- Webserver offers remote viewing on iPads/tablets/smart phones and also supplies JSON data on demand
- Logging at timed intervals, manual or on overload/underload
- Visual and audible alarms indicates overload, low battery and communications error
- Zoom in to channel to see data trends and history
- Export and log data in CSV format

Part Number	SW-MWLC
IP rating	IP67
(SW-USBBSE)	NEMA 6
Operating Temp	-20°C to 55°C
	-4°F to 131°F
Licence	Licence free
Frequency	2.4 GHz
Range	700 metres
	2300 feet
Load Cell Inputs	Up to 100
PC Requirements	Intel i3 processor with 2GB RAM
Operating System	Windows XP, Vista, Windows 7, 8 or 10



N.B: Supplied without shackles.

Features and benefits:

- Compact and light - *perfect for stage riggers dealing with limited space*
- Matt black finish - *disappears into stage rigging for zero audience distraction*
- Unique wired and wireless capability via a simple toggle switch - *one load cell for both show-critical events (wired) and more general weighing/monitoring (wireless)*
- Lighter, more compact cabling - *eliminates overly heavy and chunky cabling and gives stage riggers a more portable solution*
- User configurable overload alarms in both wired and wireless modes - *easy to set on site for simple overload protection*
- Constructed from high strength alloy steel - *for best strength to size ratio*
- Accepts standard shackles

StageSafe is a 3t capacity load cell designed exclusively for the entertainment industry.


Offering the accuracy of a load cell (0.3% of applied load) while retaining the best headroom possible (129mm/5") its matt black finish blends in perfectly as part of the stage rigging ensuring there are no distractions from the stage.

StageSafe boasts a unique switching feature allowing it to be used as a wireless or wired load cell.

Wireless mode allows simple, cable-free load monitoring and overload protection across the entire rigging setup and up to 100 StageSafe load cells may be monitored and logged real time on a tablet or laptop using our SW-MWLC software.

Wired mode gives the reassurance and dependability of a cabled load cell meaning it is suitable for show-critical events. The data can then be relayed to a single handheld display or to a PLC or external controller via our range of accessories.

StageSafe shares the industry-leading specifications of other Straightpoint wireless products – 1200 hour battery life, 700 metre / 2300ft wireless range and accuracy you can depend on.

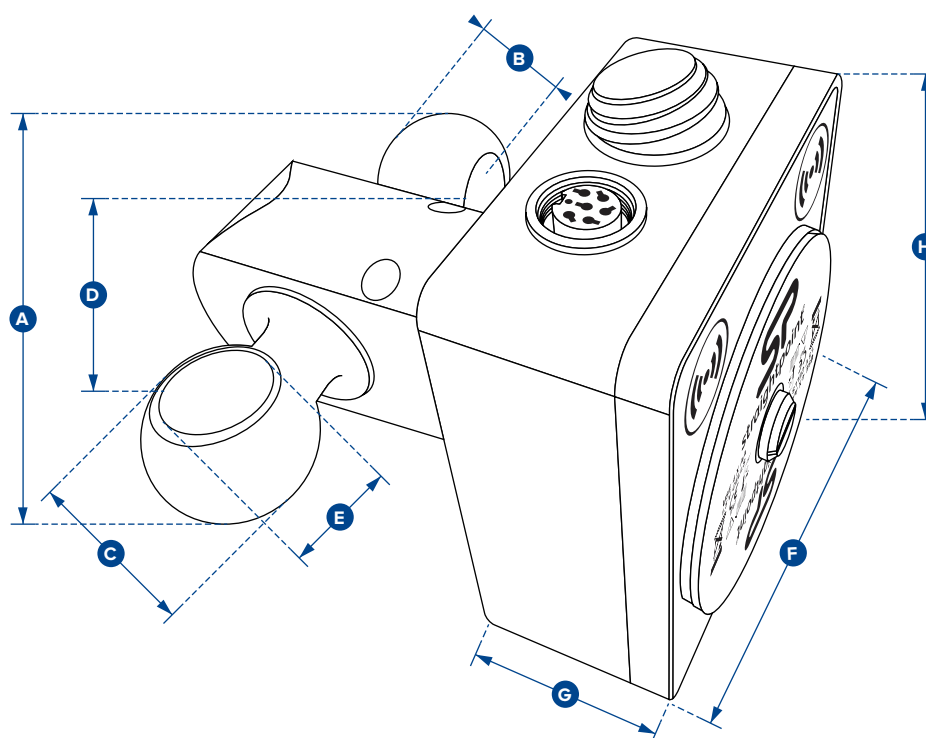

Part Number	SSDB3T	
Capacity	3te 6600lb	
Operation	Wireless	Wired
Operation Selection	Switch	
Resolution	0.001te 2lb	
Weight	1.5kg 3.3lb	
Safety Factor	5:1	
Battery Type	Load cell 4 x AA Alkaline	N/A
Battery Life	Load cell 1200hrs continuous	N/A
Operating Temp	-10 to +50°C / 14 to 122°F	
Accuracy	± 0.3% of applied load	
Wireless Frequency	2.4GHz	N/A
Wireless Range	700 metres / 2300ft	N/A
Data Rate	3Hz (up to 200Hz can be ordered for dynamic load monitoring applications)	N/A
Protection	IP65 (IP67 available as option)	NEMA 4X (NEMA 6 available as option)
Dimension A	129 5.08"	
Dimension B	25 0.98"	
Dimension C	35 1.38"	
Dimension D	88 3.46"	
Dimension ØE	21 0.83"	
Dimension F	102 4.02"	
Dimension G	45 1.77"	
Dimension H	89 3.50"	
Crosby Shackle	G2130-3.25T	

Wireless Accessories

Straightpoint's range of wireless accessories may be used with any Straightpoint wireless load cells



SW-OAM

Wireless overload alarm module


The SW-OAM is a wireless relay module featuring audio and visual warning indicators. The unit's two set point alarms can be triggered from a single or summed group of up to eight Straightpoint wireless load cells. The SW-OAM is ideal as a wireless overload detection system.



SW-SD

Wireless scoreboard display


This 100mm (4") scoreboard LED display is wireless and viewable for up to 45m/150 ft. Perfect for installation on a crane gantry, the unit operates on 110-240 VAC and displays an individual load or summed load for up to eight Straightpoint wireless devices.



SW-AO1i

Wireless base station with analogue output


The SW-AO1i provides a configurable analogue output for any single Straightpoint wireless load cell and is ideal for integration to a PC, PLC or other data acquisition system. Housed in a IP65/NEMA4X enclosure, the output can be selected from pre-calibrated voltage and current ranges of 0-5vdc, +-5vdc, 0-10vdc, +-10vdc, 0-20mA, 4-20mA.



SW-RWT

Rugged tablet

The SW-RWT tablet is the latest generation fully-rugged tablet. Featuring an array of integrated options, and a sleek, sophisticated design, the SW-RWT will change the way you look at tablets. With a MIL-STD-810G rating and Windows 7 Pro, the SW-RWT can go from the boardroom to the work site without missing a beat.



SW-SB

Wireless signal booster

The SW-SB signal booster/repeater module is battery operated and easily pairs to any Straightpoint wireless device e.g. load cell, accessories, and software solutions within range, quickly increasing coverage and extending range.



SA700C

Load cell transmitter

The SA700C transmitter connects to strain gauge transducers such as load cells, torque sensors and pressure transducers allowing them to form part of a Straightpoint wireless system.



Connecting to up to eight smart devices the HHP App allows you to stand back and remotely monitor the level of force being measured by your SP product in real-time, without the need for troublesome cabling. Once you have downloaded and installed the app on to your smart phone or tablet you will be able to use the Bluetooth feature to connect wirelessly to any Bluetooth enabled wireless SP device. This will also provide you the ease of surveying the situation from a distance of up to 100m/328ft away so you can gain a wider perspective of the immediate area. If you are working in a high-risk environment then the remote monitoring ability will also provide that extra safety assurance.

Once you are connected to the SP device; the simple and easy to use interface will allow you to use the app with the upmost efficiency. There are up to four different measurement units to choose from, depending on your preferences within your project. If you need to monitor the peak load measurement there is a 'Peak Hold' button you can select to only display the highest measurement from the SP device on-screen. Accompanying this is an option to set an audible alarm to sound when a new high or low measurement value is detected, so you know exactly when this has occurred.

The app also has a record and log feature for when you need to record a particular measurement for later referral. Once logged to the app it will then allow you the convenience of exporting the details of the logged measurement(s) either to your mobile device or send it to a particular email address, in a spreadsheet format.

Features and benefits:

- Up to 100m (328ft) remote monitoring distance
- Multiple weight unit measurement options (kN, te, kg & lbs)
- Peak Hold button
- Measurement reporting
- Export measurement report
- Zero and Gross monitoring options
- Audible alarm alert for high/low values
- User defined resolution setup



Handheld plus



Features and benefits:

- Overload counter
- User settable 90db audible overload alarm
- Multiple display units – tonnes, lbs, kg and kN
- 100Hz Peak hold
- Pre-set tare
- Wireless range 700m/2300ft

The Handheld plus is a rugged and versatile digital handheld display with a broad range of features and suitable for all Straightpoint load cell products.

At the heart of the ergonomically designed Handheld plus is a powerful PCB providing industry leading features such as user selectable units of measure (tonnes, lbs, kg and kN), programmable audible overload alarm, peak hold, pre-set tare and a user resettable overload counter.

This crucial overload alarm counter is a requirement for many safety and quality control departments, as it keeps track of overload events, allowing the load cell in question to be removed from service immediately, following the calibration voiding overload event. The load cell in question can then be sent out for proper testing and, if necessary, recalibration before re-entering service.

The HHP is suitable for connection via cable to any Straightpoint cabled load cell product and easily adapted to any other manufacturers' load cell product with a mv/v output. In addition to the standard HHP the SW-HHP is suitable for connection to any Straightpoint wireless load cell, has a range of up to 700m/2300ft and is supplied as standard with the Radiolink plus load cell.

Also available with hazardous area approval



ATEX / IECEx

Ex ia II C T4 Ga

Certification number:

SW-HHP ATEX

IECEX SIR 15.0072X / Sira 15ATEX2196X


When ordering ATEX/IECEX version of SW-HHP, order using code: SW-HHP-ATEX

Please note: There is no audible alarm with ATEX

Part Number	SW-HHP	HHP
Battery Type	2 x AA	1 x PP3 9v alkaline
Battery Life	60hrs continuous	80hrs continuous
Display Type	6 digit 25mm LCD / 6 digit 1" LCD	
Operating Temp	-10°C to +50°C / 14°F to 122°F	
Display Rate	3Hz	
Protection	IP65 / NEMA 4X	
Excitation	N/A	5v
Max Sensitivity	N/A	3mv/v
Max Resolution	1:999999 (normal mode)	
Connectivity	Wireless 2.4GHz	6-way female binder 423 socket




making the lifting industry a safer place

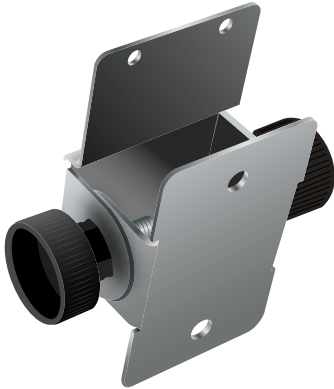

SU3282

Wall or Cab Mount Bracket

Constructed from stainless steel and fitted with a viewing angle adjusting mechanism the SU3282 bracket fits either the HHP or SW-HHP handheld displays. Ideal for wall or cab mounting leaving the operators hands free to work safely.

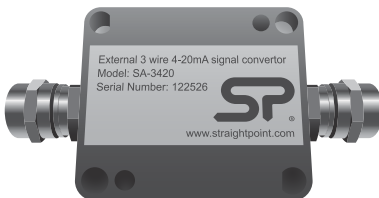

SA-3420

External Amplifier

The SA-3420 external amplifier allows you to convert the output of any of our cabled load cell products into a three wire 4-20mA analogue output. The weatherproof enclosure is fitted with stainless steel glands and is suitable for connection to a PLC, data logger or other instrumentation.



DCP10M

Windows-based Software Package

Windows-based software DCP10M plugs into the spare port on the Load cell and connects to a Windows-based PC, laptop or tablet. This easy to use software allows the operator to view live loads, control the load cell on screen and then log data dynamically by time and date or as a single reading report. Supplied with a 10 metre or 30 foot cable assembly, other lengths are available on application. A spare USB port is required.



SU4045

Handheld Rubber Boot

Drop tested to one metre at -30°C this 70SHA rubber boot is purpose moulded to fit and protect the HHP and SW-HHP handheld display against impact when being used in the harshest industrial environments.



Loadlink plus



Optional connection to Straightpoint's Handheld plus (HHP) or Straightpoint's Desktop controller data logging software package (DCP10M).

Known worldwide as the original electronic force measurement device to feature an integral display, the Loadlink plus has been in production since 1979. Over the years the line has been expanded and the Loadlink plus is now used on a daily basis for load monitoring and heavy lifts ranging in capacity from 1t to 300t, by a variety of industrial and commercial industries including manufacturing, transportation, agriculture, oil and gas, utilities, aerospace and clean energy.

This latest version of the well-known product has advanced features and benefits providing solutions for today's complicated load test and force monitoring needs. The Loadlink plus features full function push button controls for tare, choice of units (lbs, kg, kN, and tonnes), peak hold, preset tare, audible set-point alarm and an overload counter.


The advanced microprocessor based electronics provide the Loadlink plus with high speed read rates, extreme resistance to industrial level noise and unprecedented stability. This high stability gives the Loadlink plus over 5,000 divisions and the highest standard resolution of any digital dynamometer on the market today. Constructed of high-grade aircraft quality aluminium, Straightpoint's advanced internal design structure allows the product to once again top the charts with an unmatched weight to strength ratio. Straightpoint's link style dynamometers are on average 30% lighter than our closest competitor with the same safety rating.

Features and benefits:

- Large 25mm/1" LCD display
- High accuracy
- Selectable units te, lbs, kN & kg
- High resolution
- 100Hz Peak hold
- Push button tare
- Light weight
- Preset tare
- Overload counter
- 90db Audible set point alarm
- RS-485 serial output
- Design validated by F.E.A.
- 2 year warranty
- DNV-GL Type Approval
- Complies with ASME B30.26



making the lifting industry a safer place

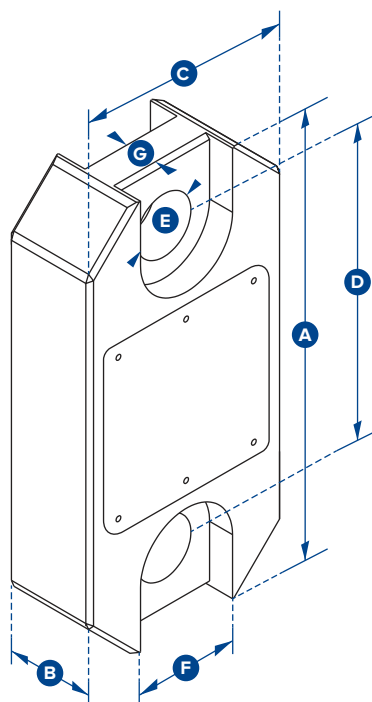

Part Number	LLP1T	LLP2T5	LLP6T5	LLP12T	LLP25T	LLP35T	LLP55T	LLP75T	LLP100T	LLP150T	LLP200T	LLP250T	LLP300T
Capacity	1,000kg 2200lb	2.5te 5500lb	6.5te 14300lb	12te 26000lb	25te 55000lb	35te 77000lb	55te 120000lb	75te 165000lb	100te 220000lb	150te 330000lb	200te 440000lb	250te 550000lb	300te 660000lb
Resolution	0.5kg 1lb	0.001te 2lb	0.001te 2lb	0.002te 5lb	0.005te 10lb	0.005te 10lb	0.01te 20lb	0.01te 20lb	0.05te 100lb	0.05te 100lb	0.1te 200lb	0.1te 200lb	0.1te 200lb
Units	kg lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb
Weight	1.5kg 3.3lb	1.5kg 3.3lb	2.4kg 5.3lb	3.7kg 8.2lb	5kg 11lb	8.6kg 19lb	13kg 28.7lb	16kg 35.3lb	34kg 75lb	46kg 101.4lb	82kg 180.8lb	82kg 180.8lb	118kg 260lb
Safety Factor	12:1	7:1	7:1	7:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1	5:1
Battery Type	9v PP3												
Battery Life	80 hours continuous												
Display Type	6 digit 25mm / 1" LCD												
Operating Temp	-10°C to +50°C / 14°F to 122°F												
Accuracy	± 0.3% of applied load												
Protection	IP65 / NEMA 4X												
Dimension A	204 8.03"	204 8.03"	249 9.80"	305 12.01"	340 13.39"	393 15.47"	424 16.69"	470 18.50"	608 23.94"	670 26.38"	700 27.56"	700 27.56"	806 31.73"
Dimension B	43 1.69"	43 1.69"	43 1.69"	47 1.85"	60 2.36"	75 2.95"	75 2.95"	75 2.95"	99 3.90"	99 3.90"	144 5.67"	144 5.67"	150 5.91"
Dimension C	104 4.09"	104 4.09"	113 4.45"	113 4.45"	115 4.53"	126 4.96"	180 7.09"	202 7.95"	255 10.04"	303 11.93"	350 13.78"	350 13.78"	426 16.77"
Dimension D	146 5.75"	146 5.75"	165 6.50"	193 7.60"	215 8.46"	225 8.86"	230 9.06"	260 10.24"	320 12.60"	360 14.17"	350 13.78"	350 13.78"	350 13.78"
Dimension ØE	24.5 0.96"	24.5 0.96"	38 1.50"	47.5 1.87"	55 2.17"	60 2.36"	76 2.99"	76 2.99"	109 4.29"	109 4.29"	145 5.71"	145 5.71"	160 6.30"
Dimension F	48 1.89"	48 1.89"	66 2.60"	Not relevant in this capacity									
Dimension G	19 0.75"	19 0.75"	32 1.26"										
Crosby Shackle	G2130						G2140						
Loading Pin Ø	19 3/4"	19 3/4"	25 1"	35 1 3/8"	51 2"	57 2 1/4"	57 2 1/4"	70 2 3/4"	83 3 1/4"	95 3 3/4"	121 4 3/4"	127 5"	152 6"



Wirelink plus



The Wirelink plus is the non-indicating version of Straightpoint's very popular Radiolink plus and Loadlink plus digital dynamometer tension load cells. This non-indicating Loadlink is designed for use with Straightpoint's Handheld plus digital display, desktop controller PC software (DCP10M) or other form of instrumentation.

Manufactured from aerospace grade aluminium and utilising an advanced internal design structure, this range of non-indicating load cells are extremely lightweight, easy to handle and are used worldwide in an array of industries for lifting, pulling, proof and structural load testing.

The extremely versatile platform can be used with digital displays including the Straightpoint Handheld plus, PLCs, data acquisition systems (DAQ) etc. and configured with a vast array of output formats to include mV/V, RS-422, RS-485, utilising the ASCII, MODBUS TRU and CAN-BUS protocols.

A standard analogue output option is available to include:

- 3 wire 0-10v
- 3 wire 0-5v
- 4 wire +/-10v
- 3 wire 4-20mA
- 2 wire 4-20mA


The Wirelink plus is supplied with a 10 metre cable as standard, however, usable cable length varies greatly with lengths available to 1,500 metres depending on output format.

Features and benefits:

- Constructed of lightweight aluminium
- Available in capacities ranging from 1 to 300 tonnes
- High accuracy
- Multiple output options to include mV/V, analogue out, ASCII, MODBUS RTU and CAN-BUS
- Available with IP68 environmental protection
- Options for subsea use available
- 2 year warranty
- DNV-GL Type Approval
- Complies with ASME B30.26



making the lifting industry a safer place

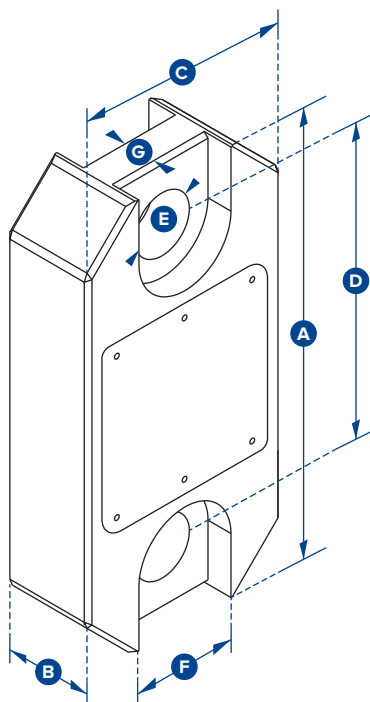

Part Number	WLP1T	WLP2T5	WLP6T5	WLP12T	WLP25T	WLP35T	WLP55T	WLP75T	WLP100T	WLP150T	WLP200T	WLP250T	WLP300T
Capacity	1,000kg 2200lb	2.5te 5500lb	6.5te 14300lb	12te 26000lb	25te 55000lb	35te 77000lb	55te 120000lb	75te 165000lb	100te 220000lb	150te 330000lb	200te 440000lb	250te 550000lb	300te 660000lb
Resolution	0.5kg 1lb	0.001te 2lb	0.001te 2lb	0.002te 5lb	0.005te 10lb	0.005te 10lb	0.01te 20lb	0.01te 20lb	0.05te 100lb	0.05te 100lb	0.1te 200lb	0.1te 200lb	0.1te 200lb
Units	kg lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb	te lb
Weight	1.5kg 3.3lb	1.5kg 3.3lb	2.4kg 5.3lb	3.7kg 8.2lb	5kg 11lb	8.6kg 19lb	13kg 28.7lb	16kg 35.3lb	34kg 75lb	46kg 101.4lb	82kg 180.8lb	82kg 180.8lb	118kg 260lb
Safety Factor	12:1	7:1	7:1	7:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1	5:1
Operating Temp	-10°C to +50°C / 14°F to 122°F												
Accuracy	± 0.3% of applied load												
Protection	IP67 / NEMA 6												
Dimension A	204 8.03"	204 8.03"	249 9.80"	305 12.01"	340 13.39"	393 15.47"	424 16.69"	470 18.50"	608 23.94"	670 26.38"	700 27.56"	700 27.56"	806 31.73"
Dimension B	43 1.69"	43 1.69"	43 1.69"	47 1.85"	60 2.36"	75 2.95"	75 2.95"	75 2.95"	99 3.90"	99 3.90"	144 5.67"	144 5.67"	150 5.91"
Dimension C	104 4.09"	104 4.09"	113 4.45"	113 4.45"	115 4.53"	126 4.96"	180 7.09"	202 7.95"	255 10.04"	303 11.93"	350 13.78"	350 13.78"	426 16.77"
Dimension D	146 5.75"	146 5.75"	165 6.50"	193 7.60"	215 8.46"	225 8.86"	230 9.06"	260 10.24"	320 12.60"	360 14.17"	350 13.78"	350 13.78"	350 13.78"
Dimension ØE	24.5 0.96"	24.5 0.96"	38 1.50"	47.5 1.87"	55 2.17"	60 2.36"	76 2.99"	76 2.99"	109 4.29"	109 4.29"	145 5.71"	145 5.71"	160 6.30"
Dimension F	48 1.89"	48 1.89"	66 2.60"	Not relevant in this capacity									
Dimension G	19 0.75"	19 0.75"	32 1.26"										
Crosby Shackle	G2130						G2140						
Loading Pin Ø	19 3/4"	19 3/4"	25 1"	35 1 3/8"	51 2"	57 2 1/4"	57 2 1/4"	70 2 3/4"	83 3 1/4"	95 3 3/4"	121 4 3/4"	127 5"	152 6"

Options					
Part Number	ICA1	ICA2	ICA3	ICA4	ICA5
Description	3 wire 0-10v analogue output	3 wire 0-5v analogue output	4 wire ±10v analogue output	3 wire 4-20mA analogue output	2 wire 4-20mA analogue output

Loadshackle



Features and benefits:

- Robust construction
- Compact size and low headroom
- Every Loadshackle proof tested
- Lightweight
- Unrivalled resolution
- Push button tare
- Environmentally sealed to IP67/NEMA6
- Peak hold
- Advanced options available for subsea applications
- Manufactured using industry leading brand shackles
- mv/v or analog signal options
- Design validated by F.E.A.



Requires connection to Straightpoint's Handheld plus (HHP), Desktop Controller data logging software (DCP10M) or External Amplifier range (SA-3420) that can be configured to provide outputs such as 4-20mA, 0-10v, 0-5v for PLC or data logger integration.

Available from stock in capacities 3.25t to 120t, and available up to 1,550t, Straightpoint's Loadshackle is manufactured from Crosby's industry leading 2130 Carbon and 2140 Alloy Bolt Type Anchor Shackles (3.25te - 120te) and the GN H10 Alloy Bolt Type Anchor Shackle (200te on up). The Loadshackle offers reduced overall weight and headroom providing a great fit for low headroom applications.

Utilising the same advanced microprocessor based electronics as all Straightpoint products, Straightpoint's cabled Loadshackle benefits from high sampling rates, extreme resistance to industrial level noise and unprecedented stability.

A huge range of tooling allows Straightpoint to calibrate in shackle for extra accuracy unlike many other load cell


manufacturers. Straightpoint cabled Loadshackles are also environmentally sealed to IP67 and, as an option, sealed for permanent submersion for sub-sea use.

The cabled Loadshackle range can be used with digital displays including the Straightpoint Handheld plus, PLCs, data acquisition systems (DAQ), etc. and configured with a vast array of output formats to include mV/V, RS-422, RS-485, utilising the ASCII, MODBUS TRU and CAN-BUS protocols or supplied with integral amplifier allowing analogue outputs such as 4-20mA, 0-10v, 0-5v etc.

Whether used in heavy lifting, mooring anchor placement or sub-sea applications, Straightpoint's cabled Loadshackle offers robust construction, advanced electronics, industry leading resolution and accuracy all at a cost-effective, affordable price.



making the lifting industry a safer place

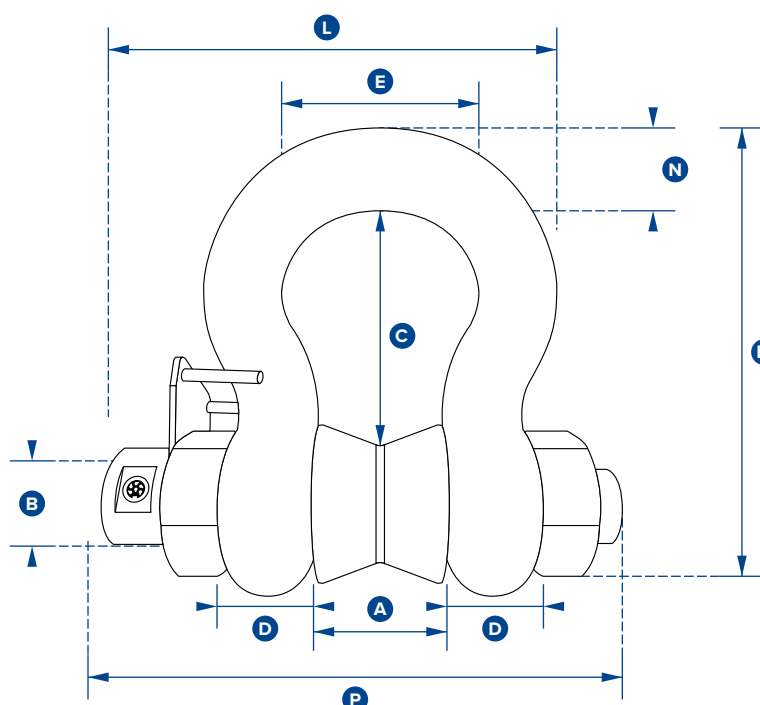

Part Number	SLB3.25T	SLB6.5T	SLB12T	SLB25T	SLB55T	SLB85T	SLB120T	SLB200T	SLB300T	SLB400T
Capacity	3.25te 7150lb	6.5te 14300lb	12te 26400lb	25te 55000lb	55te 120000lbs	85te 185000lbs	120te 260000lbs	200te 440000lbs	300te 660000lbs	400te 880000lbs
Resolution	0.005te 10lb	0.005te 10lb	0.01te 20lb	0.02te 50lb	0.05te 100lb	0.05te 100lb	0.1te 200lb	0.2te 200lb	0.5te 1000lb	0.5te 1000lb
Units	tonne lb									
Weight	2.8kg 6.16lb	3.2kg 7lb	8kg 17.6lb	18kg 40lb	25kg 55lb	45kg 99lb	85kg 187lb	254kg 560lb	374kg 825lb	614kg 1354lb
Safety Factor	5:1 when used with load bobbin									
Operating Temp	-10°C to +50°C / 14°F to 122°F									
Accuracy	±1% of applied load									
Protection	IP67 std or sub sea as POA option / NEMA 6									
Dimension A	26.9 1.06"	36.6 1.44"	51.5 2.03"	73 2.87"	82.5 3.25"	105 4.13"	127 5.00"	180 7.09"	205 8.07"	230 9.06"
Dimension ØB	19.1 0.75"	25.4 1.00"	35.1 1.38"	51 2.01"	57 2.24"	70 2.76"	82.5 3.25"	125 4.92"	150 5.91"	175 6.89"
Dimension C	56.9 2.24"	79.7 3.14"	113 4.45"	170 6.69"	189.5 7.46"	253 9.96"	319.5 12.58"	483 19.02"	576 22.68"	650 25.59"
Dimension D	14.46 0.57"	22.4 0.88"	31.8 1.25"	44.5 1.75"	51 2.01"	66.5 2.62"	76 2.99"	120 4.72"	130 5.12"	165 6.50"
Dimension E	42.9 1.69"	58 2.28"	82.5 3.25"	127 5.00"	164 6.46"	184 7.24"	200 7.87"	290 11.42"	305 12.01"	325 12.80"
Dimension H	103.3 4.07"	148 5.83"	210 8.27"	313 12.32"	348 13.70"	453 17.83"	546 21.50"	810 31.89"	950 37.40"	1100 43.31"
Dimension L	124.2 4.89"	153.5 6.04"	193.8 7.63"	278 10.94"	303 11.93"	365 14.37"	405 15.94"	577 22.72"	612 24.09"	702 27.64"
Dimension N	17.5 0.69"	24.6 0.97"	35.1 1.38"	57 2.24"	61 2.40"	79 3.11"	92 3.62"	120 4.72"	130 5.12"	165 6.50"
Dimension P	140 5.51"	170 6.69"	215 8.46"	290 11.42"	314 12.36"	391 15.39"	438 17.24"	562 22.13"	612 24.09"	707 27.83"

Low Headroom Link



Features and benefits:

- Low height
- Range from 1t to 30t
- High accuracy
- Lightweight and portable
- Accepts standard shackles
- Constructed from high strength alloy steel
- Huge range of output options
- Connects to Straightpoint data logging software



Requires connection to Straightpoint's Handheld plus (HHP), Desktop Controller data logging software (DCP10M) or External Amplifier range (SA-3420) that can be configured to provide outputs such as 4-20mA, 0-10v, 0-5v for PLC or data logger integration.

Straightpoint introduces its range of low headroom links designed to provide accurate measurement of loads in the most challenging applications where headroom restrictions are a major factor.


Constructed from high strength alloy steel and exposed to an array of testing during development, this impressive range of load cells is designed to work with industry standard shackles from manufacturers such as Crosby and Van Beest. Applications include weighing, lifting, force measurement and load monitoring of structures such as lighting trusses, hoist mountings and fly line tensioning.

The unique low headroom design combines the ability to lift loads with capacities up to 30t with state-of-the-art electronics, high accuracy and resolution of over 5000 divisions. Measured loads can be displayed with our Handheld plus digital display/controller or Windows PC Desktop Controller data logging software.

A vast array of optional output formats are also available to include mV/V, RS-422, RS-485, utilising the ASCII, MODBUS, TRU and CAN-BUS protocols and analog outputs such as 4-20mA for connection to PLCs, Data Acquisition systems (DAQ) or other required instrumentation. Usable cable length varies greatly, ranging from 10m/23ft to 1,500m/4900ft depending on output format.



making the lifting industry a safer place

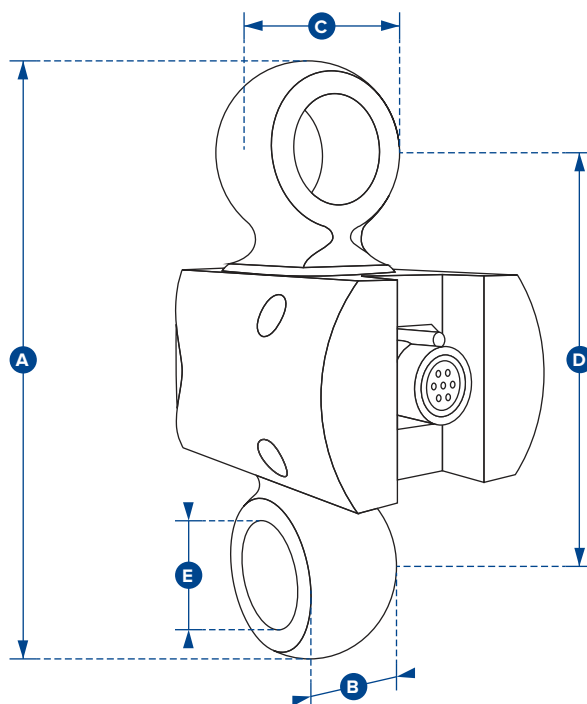

Part Number	DB1T	DB3T	DB5T	DB10T	DB20T	DB30T
Capacity	1000kg	3te	5te	10te	20te	30te
	2200lb	6600lb	11000lb	22000lb	44000lb	66000lb
Resolution	0.5kg	0.001te	0.001te	0.002te	0.005te	0.005te
	1lb	2lb	2lb	4lb	10lb	10lb
Units	tonne					
	lb					
Weight	1kg	1.2kg	2kg	2.5kg	4kg	6.2kg
	2.2lb	2.6lb	4.4lb	5.5lb	8.8lb	13.7lb
Safety Factor	5:1					
Operating Temp	-10°C to +50°C / 14°F to 122°F					
Accuracy	± 0.3% of applied load					
Protection	IP67 / NEMA 6					
Dimension A	110	129	165	205	249	248
	4.33"	5.08"	6.50"	8.07"	9.80"	9.76"
Dimension B	18	25	33	41	66	58
	0.71"	0.98"	1.30"	1.61"	2.60"	2.28"
Dimension C	33	35	50	63	90	87
	1.30"	1.38"	1.97"	2.48"	3.54"	3.43"
Dimension D	74	88	111	135	153	150
	2.91"	3.46"	4.37"	5.31"	6.02"	5.91"
Dimension ØE	18	21	27	37	53	44
	0.71"	0.83"	1.06"	1.46"	2.09"	1.73"
Crosby Shackle	G2130-2T	G2130-3.25T	G2130-6.5T	G2130-12T	G2130-25T	G2140-30T