


LIFT - ACE

Crane Scale (500kg ~ 5000kg)

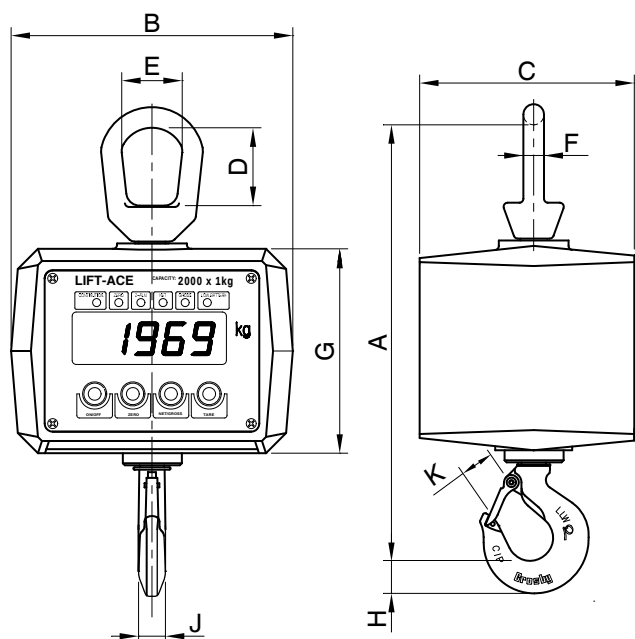

Features;

- Lightweight portable scale
- Watertight integrity in the harshest environments (IP64 enclosure) cast aluminium housing
- 75 hours running rechargeable battery
- Sturdy swivel hook ON/OFF, ZERO, NET/GROSS, TARE push button switch

SPECIFICATIONS

Model	ACBE				
Capacity (Max.)	500kg	1000kg	2000kg	3000kg	5000kg
Division (e=d)	0.2kg	0.5kg	1kg	1kg	2kg
Display	25mm height LED, 4digit				
Power	6 volt lead-acid rechargeable battery				
Battery operating time	75 hours				
Recharging time	Approx. 4 hours				
Operating temp.	-10°C ~ 50°C				
Enclosure	Cast aluminium, IP64				
Safe overload	150% of rated capacity				
Ultimate overload	400% of rated capacity				
Hook	Swivel hook with thrust bearing				
Switches	On/Off, Zero, Net/Gross, Tare				
Annunciators(LED lamp)	Continuation(Auto power OFF), Zero, Net, Gross				
Accessories	Battery charger				
Option	1) I.R. Type Remocon 2) Wireless Handy Indicator(Model : BS-52R) 2.4GHz Bluetooth Communication 3) Wireless Desktop Indicator / Large Display				

ORDERING INFORMATION

ACBE	-	500
MODEL		CAPACITY
ACBE		500kg, 1000kg, 2000kg, 3000kg 5000kg

Dimmension-mm

Model	Capacity x Division	A	B	C	D	E	F	G	H	J	K (with latch)	Weight (kg)
ACBE - 500	500kg x 0.2kg	324	210	160	58	44.5	16	152	25.4	22.4	23.6	7kg
ACBE - 1000	1000kg x 0.5kg											
ACBE - 2000	2000kg x 1kg											
ACBE - 3000	3000kg x 1kg	429	214	195	74.2	57	22.6	168	35.8	28.7	35.8	14 kg
ACBE - 5000	5000kg x 2kg	476	214	195	85	63.5	25.4	168	43	36.6	42.9	18 kg

* Specifications are subject to change without notice

SEP, 2024

BONGSHIN LOADCELL CO., LTD.

55, Seobuk-ro, Gajang Ind.Complex, Osan-si, Korea / 18103
 TEL : 82-31-742-6661 www.bongshin.com
 FAX : 82-31-742-6664 E-mail : loadcell@bongshin.com